

Quick Start Guide

FSC776



FSC776W



FSC776B

Smart · Reliable · Secure

Faleemi Technologies Ltd



www.faleemi.com



support@faleemi.com



support@faleemi.com



facebook.com/faleemi



youtube.com/c/Faleemi

Apple, Apple Store, iPad, iPhone, MAC (Text, Logo, Picture) are trademarks of Apple, Inc.
Android, Google Play (Text, Logo, Picture) are trademarks of Google Inc.
Samsung (Text, Logo, Picture) is a registered trademark of Samsung Electronics Co., Ltd.
MicroSD text and logo are the trademark of SD-3C, LLC.
Wi-Fi is a registered trademark of the Wi-Fi Alliance.

All other products, names or companies are the brands or registered trademarks of their respective owners.



Made in China

Technical specifications are subject to change without notice.
No responsibility is taken for errors in contents or printing.
© Faleemi Technologies Ltd or its affiliates. All rights reserved.

Version.11.2018



We at Faleemi are committed to do our part in protecting our environment. In this continuing effect, we have supplied the detailed manuals, documentation, software, troubleshooting and video guides on our website



www.faleemi.com/support

Thank You

Dear Customer,

Thank you to choose Faleemi among all the brands. We hope our products will protect your home and give you peace of mind.

At Faleemi, we truly care about our customers' Purchase Experience and User Experience, so "Customer satisfaction guaranteed is our goal". We are 100% dedicated to your complete satisfaction.

If your experience has been something less than amazing, or need additional information, please drop us an email at support@faleemi.com. Or you are welcome to visit our website www.faleemi.com/faq for more information. Please do remember that we are always more than happy to ensure you're a HAPPY Customer.

As a growing company, we are improving all aspects of our service and products. If you got any suggestion or comment, welcome to let us know. We will continue to improve and provide our customers with quality products and service.

Yours sincerely,

Team Faleemi



www.faleemi.com



support@faleemi.com



youtube.com/c/Faleemi



facebook.com/faleemi

Contents


Product information	1
Download APP and Getting started	2
Setup Option 1: WPS/QSS Button Setup Recommended	3
Setup Option 2: One Key WiFi Recommended	5
Add the connected camera to Faleemi App	7
Setup Option 3: Add cameras via WiFi configuration guide	9
Live Video Interface	15
Pan / Tilt / Zoom Control	16
How to connect the camera to the second Phone?	17
Advanced Settings	19
How to do the settings for receiving message alert on your phone?	20
[Push Setting]	21
[Alarm Event]	22
[Notifications]	23
How to set it to record constantly to the memory card?	24
How to record alarm video to the memory card?	25
How to view the recorded video on memory card?	26
Trouble Shooting Frequently Asked Questions	27
1. How do I change my camera password?	27
2. Multi-view	28
3. How do I change my video stream resolution?	28
4. how do I flip my camera's video stream?	28
5. How to reset your camera (restore to factory default)?	28
6. How to set email alert?	28
7. How to link your camera to your PC/Mac by Faleemi Plus	28

What's in the box?

- FSC776 HD Pan/Tilt Wireless Security IP Camera
- Ceiling/Wall Mounting Bracket
- Mounting Screws & Plugs
- Power Adapter
- Quick Start Guide



Connections

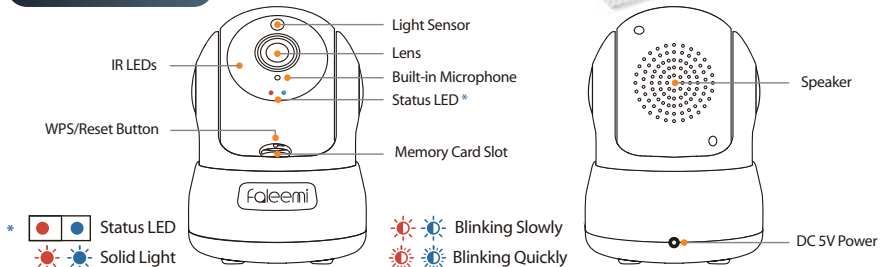

Indicator Light Status	Device Status
Red light is blinking slowly	Power up and activating
Red and blue lights are blinking slowly	The device is ready to connect
Blue light is blinking quickly	The device is receiving the WiFi signal or connecting to the WiFi
Blue and red lights are solid and steady	The device is connected to the network
Red light is blinking quickly	The device is reset to restore to factory default
Blue light goes off	The device failed to connect to the network

Download the Faleemi APP (Android / iOS) before doing the setup

Connect your mobile device to your WiFi and download the App "Faleemi" from the App Store or Google Play store, or scan below QR code to download it.



Before configuring your camera, please read the points below.

- Please make sure the camera is in the same room, close to the router, before performing the setup. You can relocate it to where you want after it is all set up. You just unplug it and move it to the new location and plug it in, the camera will connect to your WiFi automatically, no need to set it up again.
- Please make sure your phone is connected to your **2.4GHz WiFi (not cellular data and 5GHz WiFi)** before doing the setup. Your 2.4GHz WiFi name (SSID) must be different from your 5.0GHz one.

Please make sure your WiFi name and password do not have the special characters " & " and " ' "(apostrophe).

If you are not sure, please go to your router settings to find this out.

Note: THIS WILL NOT AFFECT THE 5GHz WIFI USE OF YOUR OTHER WIRELESS DEVICES :)

If you don't know how to go to your router settings, please visit our website

www.faleemi.com/blocks/router to find the instructions or contact us at support@faleemi.com.

- If you don't see the **blue light** , please do a "Factory Reset". This process is outlined on **Page 28** of this manual. ["5. How to reset your camera (restore to factory default)?"].

Now, please follow below instructions to get your camera set up.


Setup Option 1 WPS/QSS Button Setup

Please check if your WiFi router has a "WPS/QSS" button or a WPS icon (See below picture). Please check your router's top, 2 sides, back or bottom. If you find it, please follow below steps to do the setup.



If you don't find it, there are still 2 options for you to set up the camera. Please turn to **Page 5** for Setup Option 2: One Key WiFi Setup or **Page 9** for Setup Option 3: Add cameras via WiFi configuration guide.



WPS: Wi-Fi Protected Setup (Wi-Fi Simple Config) is a network security standard to create a secure wireless home network. The standard emphasizes usability and security.

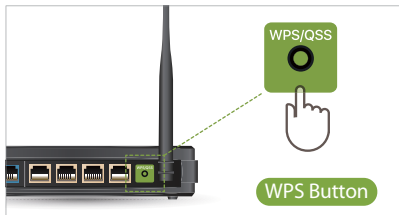

1. Please **put your camera close to your WiFi router** and plug it in, you will hear "Beep". The camera is initializing by rotating from left to right and up to down and stop in center finally. And then you will see the red and blue lights are blinking slowly.




Note: when the camera is startup, it will sound one "Beep"

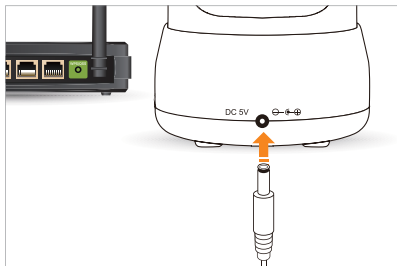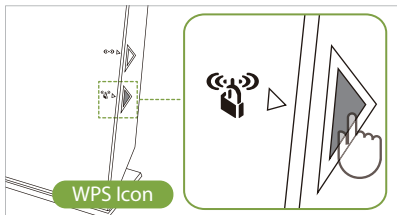

2. Please press down the reset button for about 3~5 seconds and then let it go.




CAUTION: The button is small. Holding for longer than 10 seconds will reset the camera.

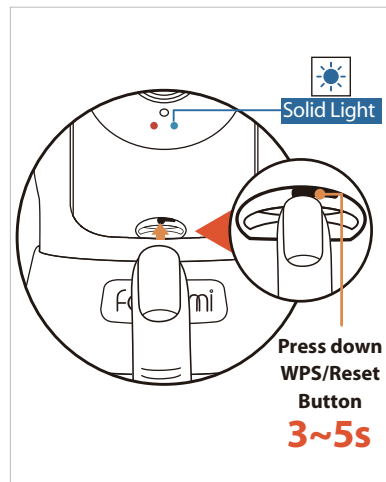

And then you will see the blue light turns on, solid and steady (not blinking).

3. When you see the solid blue light , please press the WPS button for 3 seconds on your router **before 30 seconds has passed.**

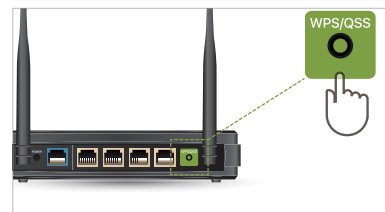


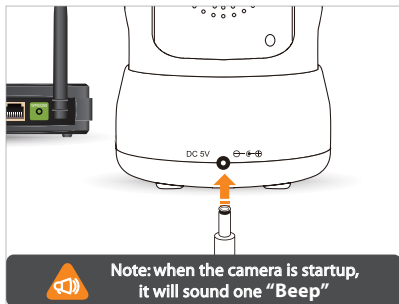
You will see the blue light on the camera blinking very fast and then hear **2 Beep**. The camera is connecting to your WiFi.




4. Wait for around 30 seconds until you see the blue light is flashing slowly again. And follow **Page 7** to add the camera to your mobile/tablet Faleemi APP.

Setup Option 2: One Key WiFi


1. Please **put your camera close to your WiFi router** and plug it in, you will hear "Beep". The camera is initializing by rotating from left to right and up to down and stop in center finally. And then you will see the red and blue lights are blinking slowly. 




5 mins NOTE Only when it blinks red and blue slowly , should you start to do the setup. It lasts **only 5 mins** after the camera is powered up.


If you don't do the setup in 5 mins, please unplug the camera and plug it in again to get another 5 mins setting time.

2. Open the Faleemi App, click on the menu icon **[More]**, Click on **[One key WiFi]**.

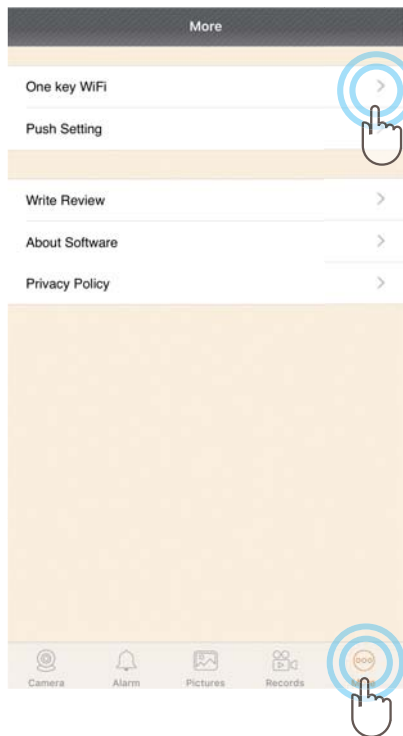


3. Enter your 2.4GHz WiFi password, Click on **[Configuration]**.

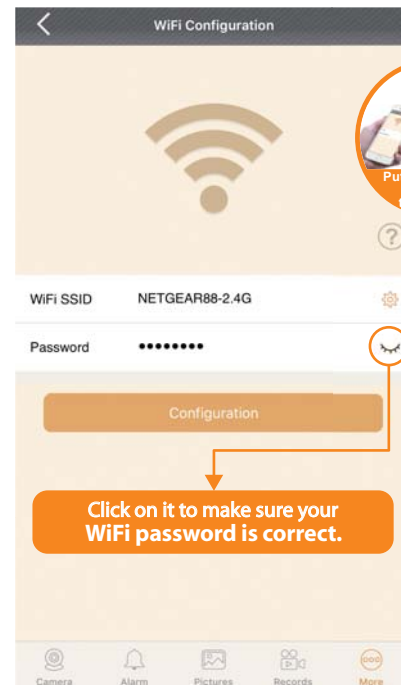

 **Note:** When click on "Configuration" button. Your phone will make a loud sound to transmit the data to the camera.

4. After the configuration is succeeded, the camera will sound with 2 Beeps.

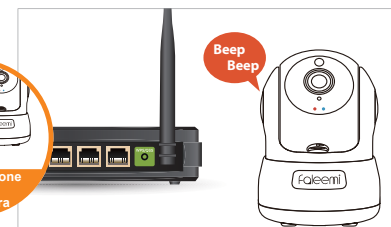

Troubleshooting

1. If you see the blue light goes off instead of solid on, the WiFi password you just input may be wrong. Please reset the camera (instructions in **Page 28**) and do the setup again.
2. If your WiFi password was correct but still failed, the WiFi you were connected may be 5GHz WiFi.
3. If all your WiFi and password were correct, it is still failed, there may be the special characters apostrophe (') and ampersand (&) in your WiFi SSID or password.

5. And follow **Page 7** to add the camera to your mobile/tablet Faleemi APP.


Add the connected camera to Faleemi App

*Please make sure the phone is connected to the same WiFi as the camera you've connected to.


1. Click on **[Add Camera]**.




2. Click on **[Add the cameras which are already connected to your WiFi network]**.

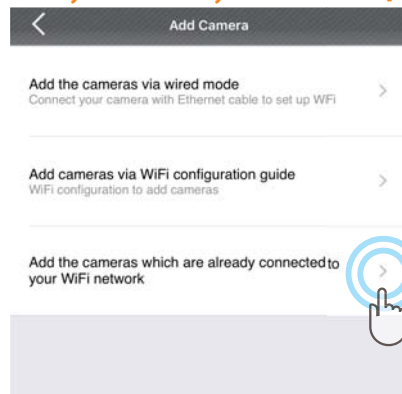

3. Click on **[LAN Search]**.

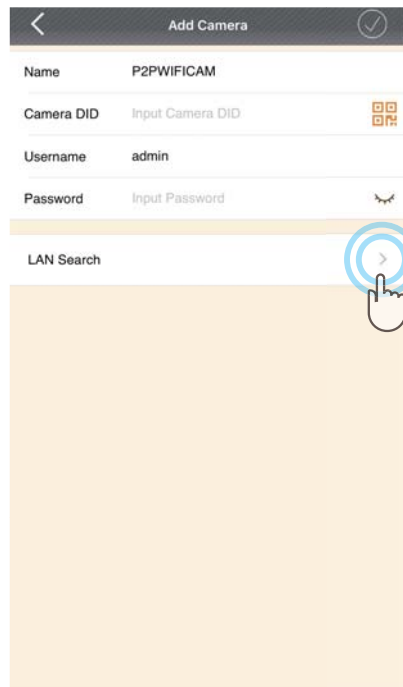


4. Click on the camera searched.

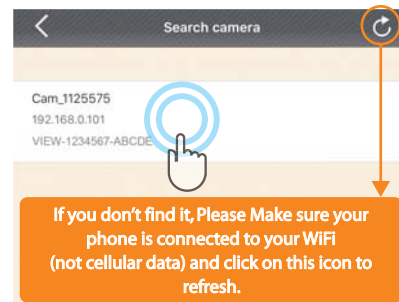


If you don't find it, Please Make sure your phone is connected to your WiFi (not cellular data) and click on this icon to refresh.

5. Give your camera a name, and put the default password (123456), click on **[✓]**.

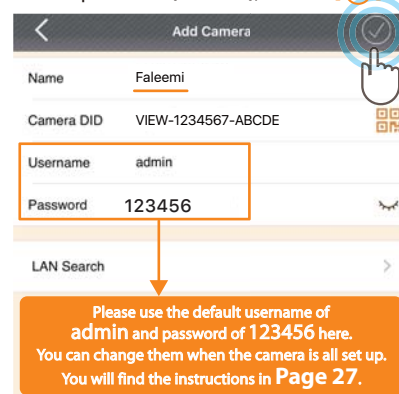

Please use the default username of **admin** and password of **123456** here. You can change them when the camera is all set up. You will find the instructions in **Page 27**.

6. You will see it says the camera is **Online**. Congratulations! Your camera is all set up. **Click on the image** to enjoy viewing and controlling it now.

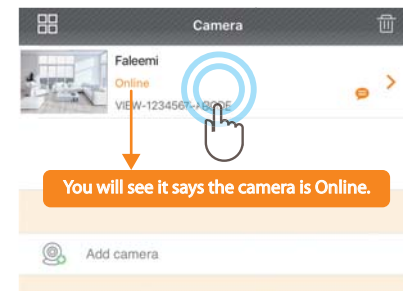



You will see it says the camera is Online.


Congratulations!
Your camera is connected now



1. To ensure the security of your camera, you are suggested changing the default password. Please refer to the Instruction in **Page 27**.
2. You can relocate the camera now. Please just unplug it and move it to the new location and plug it in, the camera will connect to your WiFi automatically, no need to set it up again.
- * But please make sure the new location will be not far from your router.

Setup Option 3: Add cameras via WiFi configuration guide

1. Please **put your camera close to your WiFi router** and plug it in, you will hear **"Beep"**. The camera is initializing by rotating from left to right and up to down and stop in center finally. And then you will see the red and blue lights are blinking slowly. 

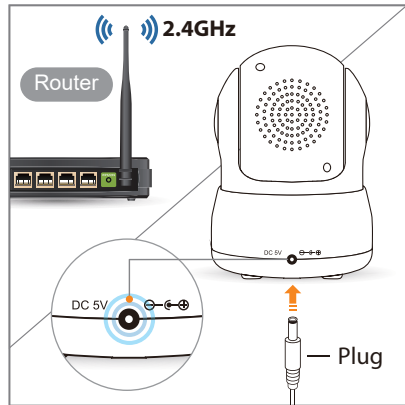 **Note:** when the camera is startup, it will sound one "Beep"




 **5 mins NOTE** Only when it blinks red and blue slowly , should you start to do the setup. It lasts **only 5 mins** after the camera is powered up.

If you don't do the setup in 5 mins, please unplug the camera and plug it in again to get another 5 mins setting time.


2. Open the Faleemi App, click on **[Add Camera]**.




3. Click on **[Add cameras via WiFi configuration guide]**.

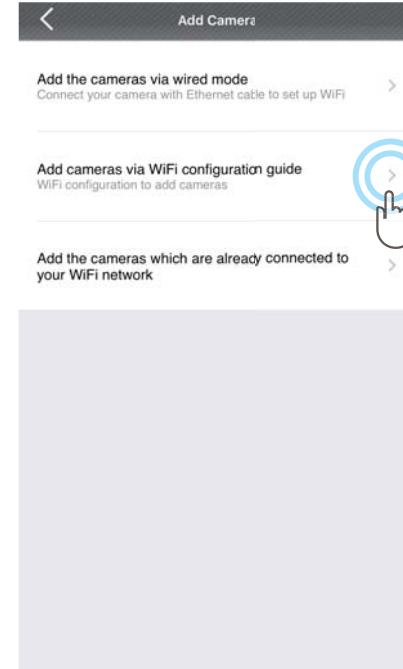


4. Please scan the QR Code at the bottom of the camera.

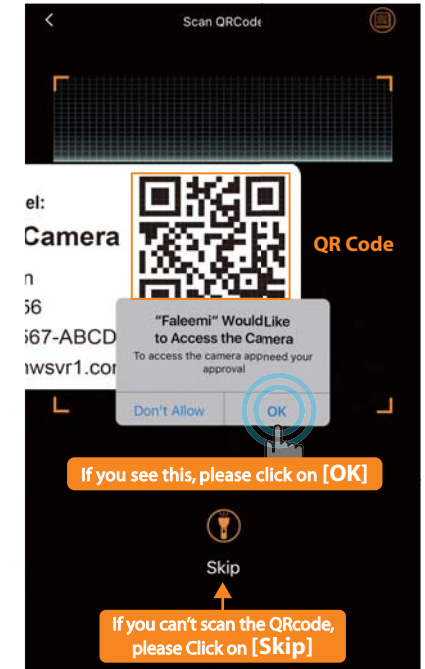


5. Click on **[The blue light is flashing slowly]**.

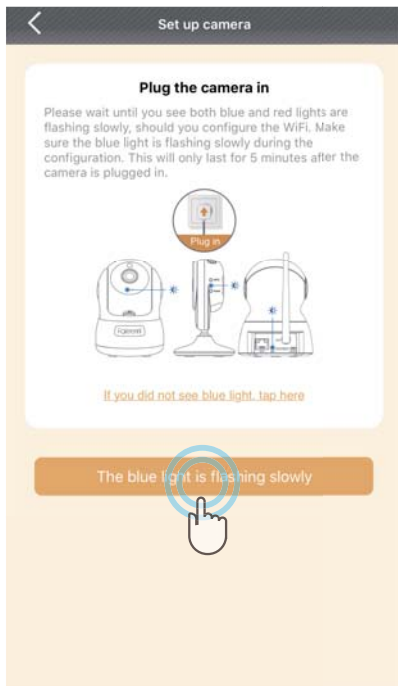


6. Type in the name you have selected for your camera and click on **[Next]**.

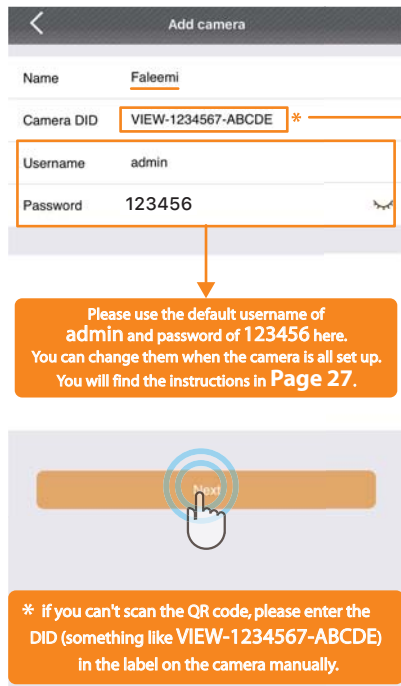

7. Input your WiFi password and click on **[Connect to WiFi]**.

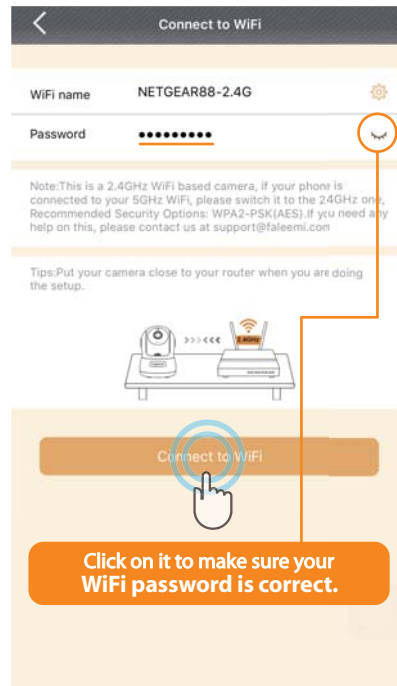


8. Click on **[Start]**.

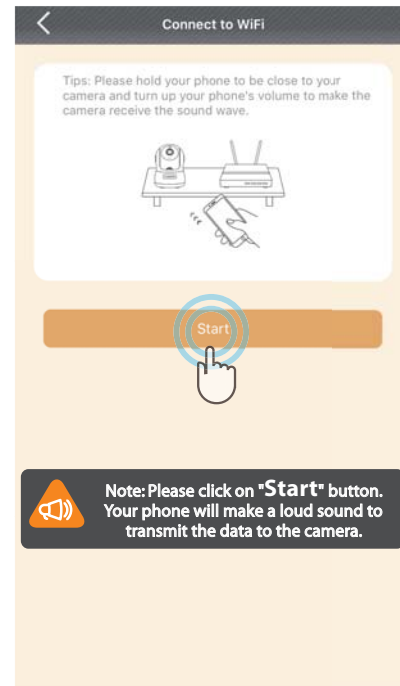


9. Connect to WiFi.



When the camera receives the WiFi signal, it will sound with 2 beeps. When the connection is successful, it will take you to the camera page.

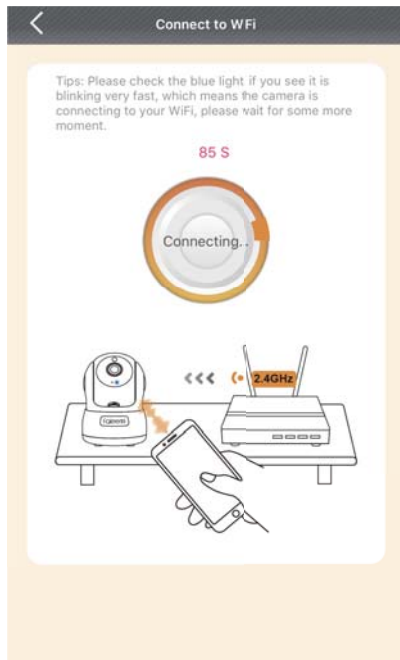**10. You will see it says the camera is Online.**

Congratulations! Your camera is all set up. **Click on the image** to enjoy viewing and controlling it now.

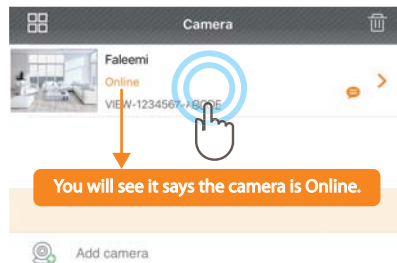

You will see it says the camera is Online.

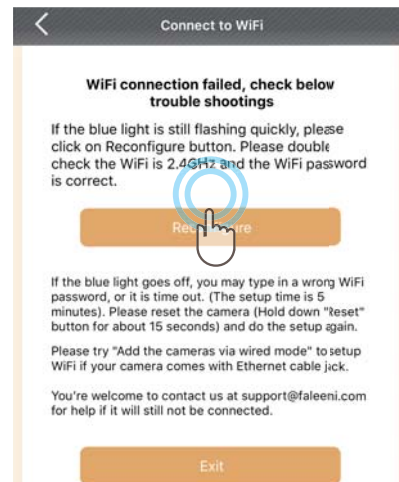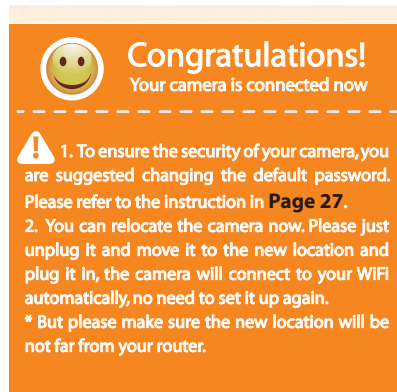

If the setting is failed, please find below solution or contact us by

Email: support@faleemi.com
Skype: [support@faleemi.com](https://www.faleemi.com)
Phone: 213 293 3560
EST: 6am~10am, 8pm~11pm
PST: 6am~7am, 5pm~12pm

When you call us, please wait some more moment until we pick up the phone.

Troubleshooting

1. If you see the blue light goes off instead of solid on, the WiFi password you just input may be wrong. Please reset the camera (instructions in **Page 28**) and do the setup again.
2. If your WiFi password was correct but still failed.
 - (a). Please make sure your phone is connected to your **2.4GHz WiFi** (not 5GHz WiFi) before doing the setup.
 - (b). Your 2.4GHz WiFi name (SSID) must be different from your 5.0GHz one.
 - (c). Please sure your WiFi name and password do not have the special characters "&" and "'"(apostrophe).

If you are not sure, please go to your router settings to find this out.
If you don't know how to go to your router settings, please visit our website www.faleemi.com/blocks/router to find the instructions.

For more FAQ information, please visit <https://www.faleemi.com/faq/>
Or contact us :
support@faleemi.com

Live Video Interface




Tips: turn on the Microphone; you will see a pop-up button "Hold to Talk", Hold this button to talk.


- | | | |
|---------------------|-----------------------|----------------------------------|
| Cruise Vertically | Snapshot to phone | Restore to default |
| Cruise Horizontally | Record video to phone | 480P / 720P |
| Menu | Audio on/off | Contract |
| Flip | Microphone on/off | IR LED Off |
| Mirror | Contrast | LED Auto Mode |
| Exit | Brightness | Preset Set or Call Preset |

Pan / Tilt / Zoom Control

When you slide on the screen, if it doesn't turn any more, it means it arrives the end of this direction, please turn it in opposite direction.

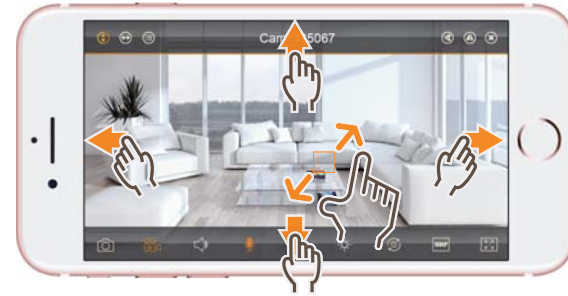

iOS

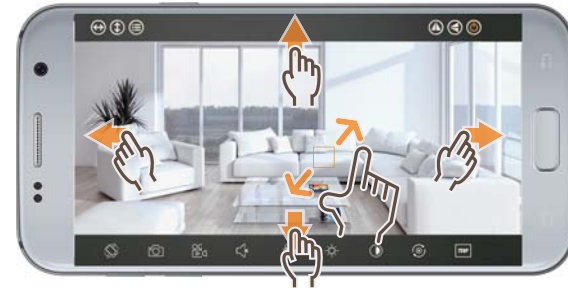

Android

How to connect the camera to the second Phone?

After you use one phone to get your camera connected, if you would like to add your camera to the second phone.

Option A Locally

If your second phone can be connected to the same WiFi as your camera, please follow the instruction in **Page 7**.


Option B Remotely

If your second phone can not be connected to the same WiFi, please follow below instructions.


1. Download the Faleemi App to your second phone.
2. Open the Faleemi App, Click on **[Add Camera]**.



3. Click on **[Add the cameras which are already connected to your WiFi network]**.

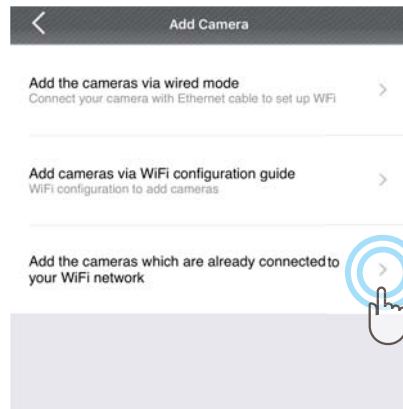


4. Please find your camera DID (something like **VIEW-1234567-ABCDE**) in your first phone or the label on the camera.

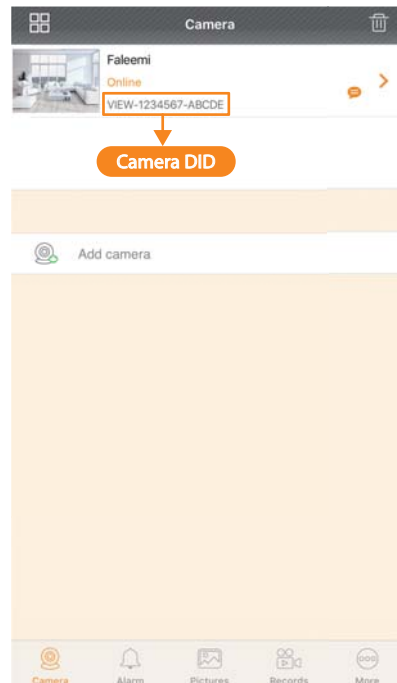

5. Give your camera a name, and input Camera DID, Password, click on **[✓]**.

It will take you to the home page.

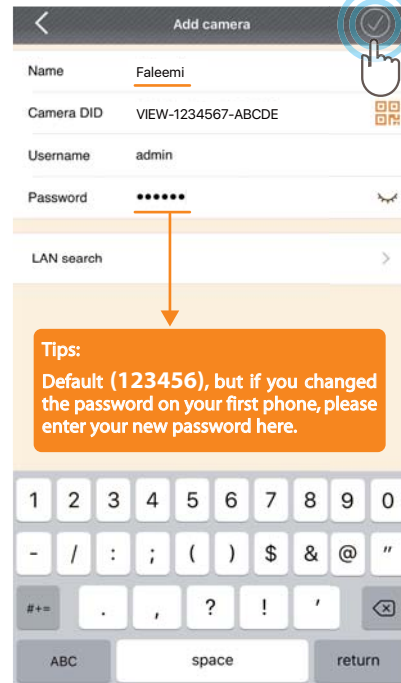


Advanced Settings

Please follow below steps to go to Advanced Settings to do more settings.

1. Click on the icon [>].




2. Click on [Advanced Settings].

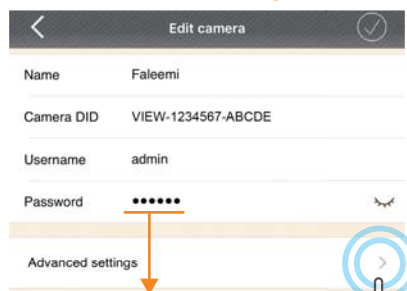

Tips:

If you change your password, please remember to update the new password to your other phone and click on "✓"


3. Do [Advanced Settings] here.

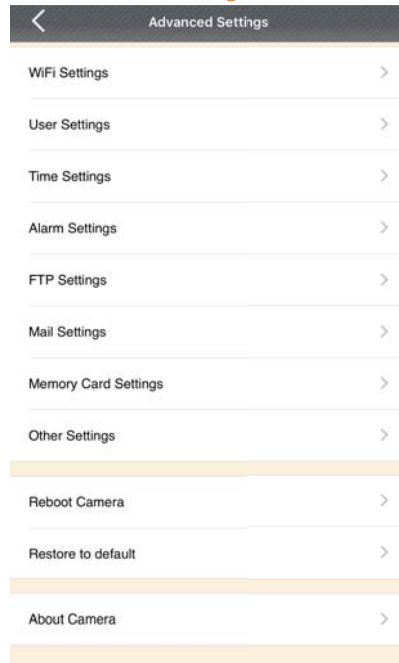

How to do the settings for receiving message alert on your phone?

[Alarm Settings]

1. Click on the icon [>].

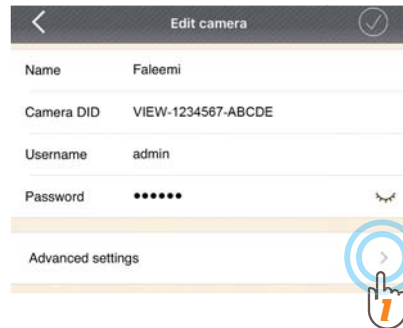


2. Click on [Alarm Settings].




3. Enable [Motion Detection Alarm].

4. Click on [✓].

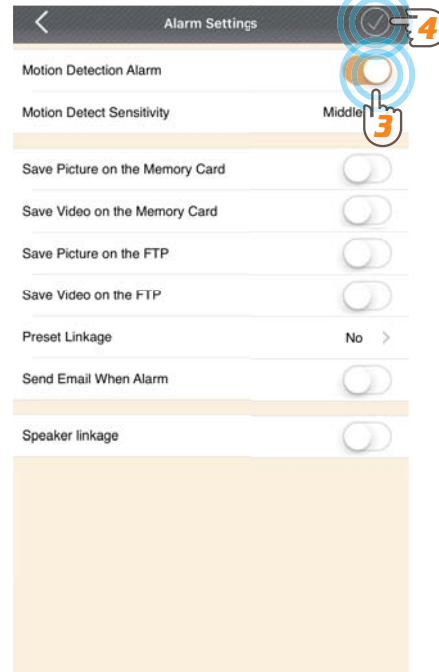


[Push Setting- iOS]


1. Click on **[More]**.
2. Click on **[Push Setting]**.

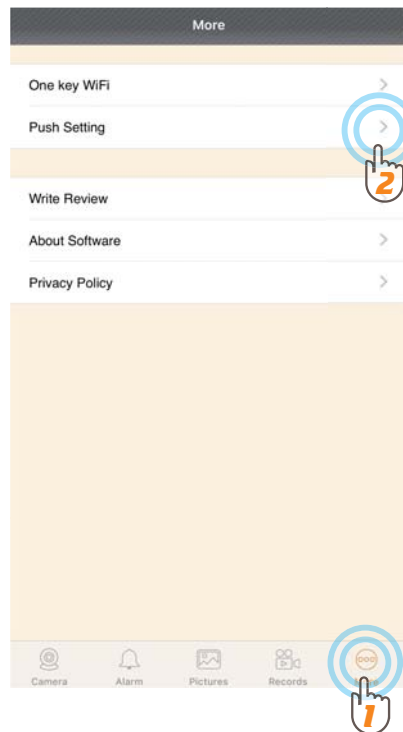

3. Find the camera you want to receive message alert and turn on the button **[Allow app receiving push message]**.

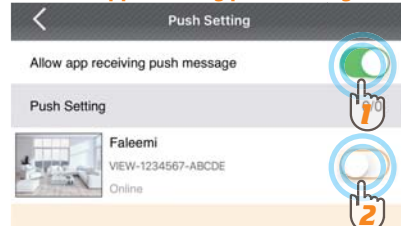


4. Click on **[OK]**.

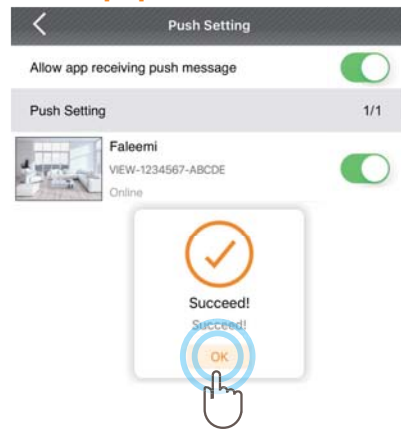**[Push Setting- Android]**


1. Click on the icon **[>]**.



2. Enable **[There is an alarm]**, **[Allow Push alarm]**
3. Click on **[✓]**.

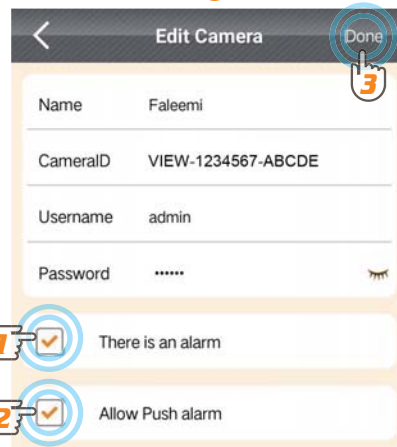**Alarm Event**

1. Click on **[Alarm]**.
2. Click on **[>]**.

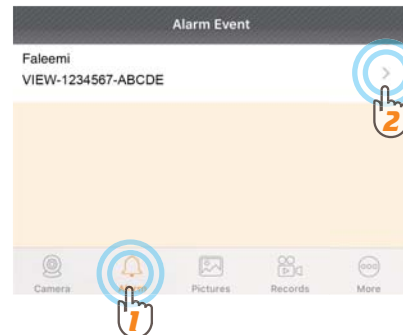


3. It shows alarm log list.




Notifications

You will receive text messages when there's motion.

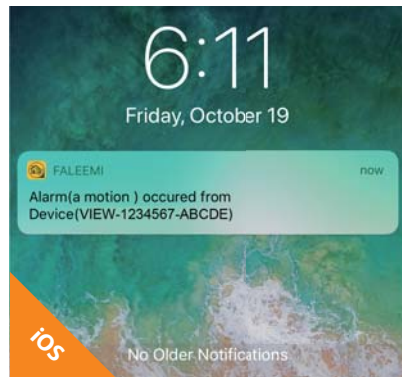


If you don't receive the message, please go to your phone's **[Settings]—[Notifications]—[Faleemi APP]** to check if you turn on the button **“Allow Notifications”**.

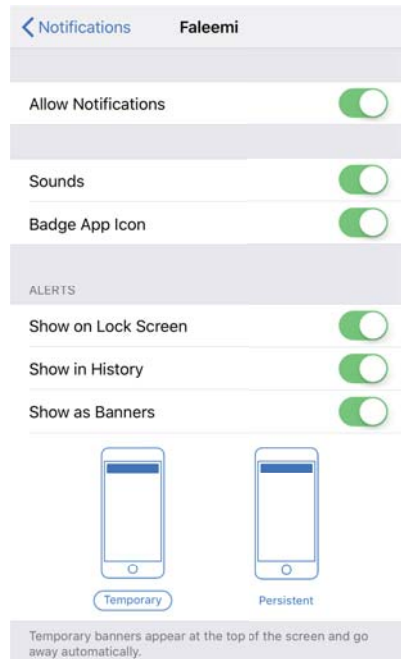

How to set it to record constantly to the memory card?


* Please format your memory card before using.



Memory Card Slot


Please insert the Micro SD card as what shows at left. Suggest using Micro SDHC/SDXC (* MicroSD, MicroSDHC text and logo are the trademark of SD-3C, LLC)

1. Click on the icon [>].

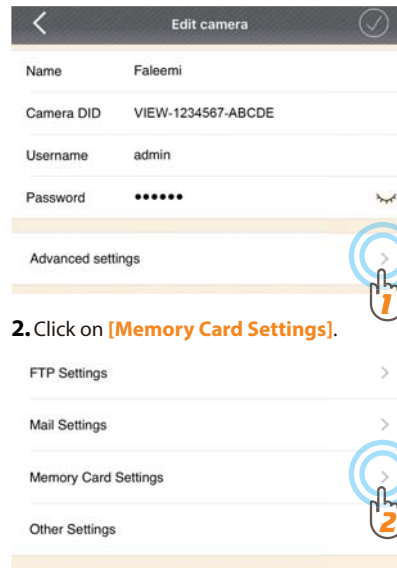


2. Click on **[Memory Card Settings]**.

3. Enable **[Continuous Recording]**.
4. Set **[Record Time]** (15 Mins Max).
5. Click on [✓].

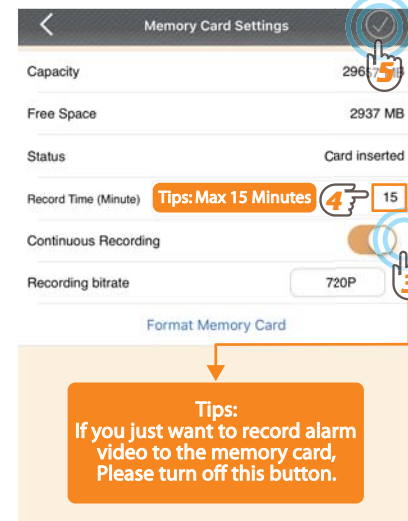


How to record alarm video to the memory card?

1. Click on the icon [>].

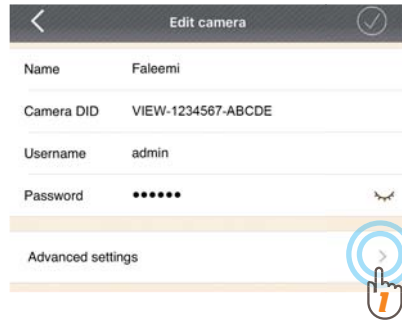


2. Click on [Alarm Settings].

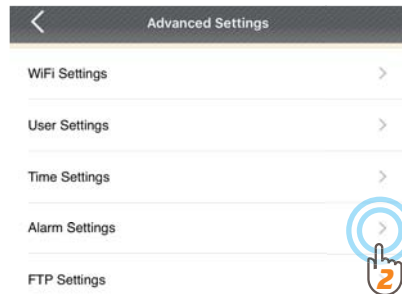

3. Enable [Motion Detect Alarm].

4. Enable [Save Video on the Memory Card].

5. Click on [✓].

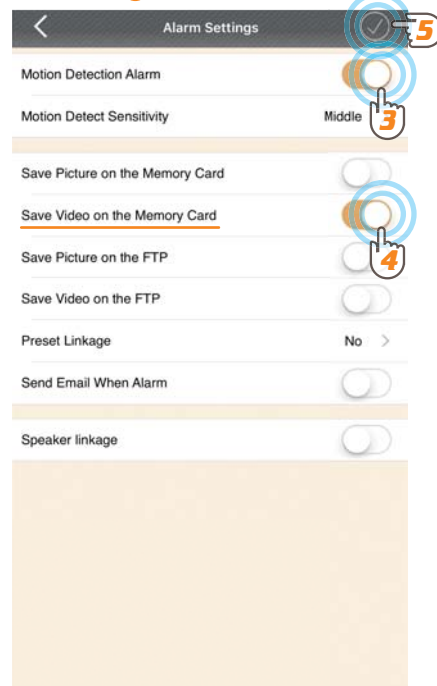

How to view the recorded video on memory card?

1. Click on [Records].

2. Click on [Memory Card].

3. Click on [Camera].




4. Click on [All], Select recording.

5. Select Date.

6. Click on [✓].



7. Click on the file to playback the recorded video.

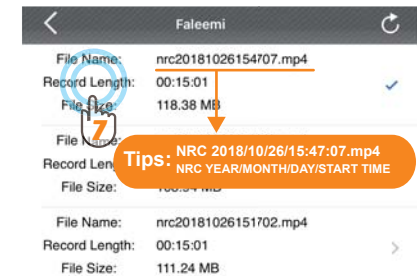

Troubleshooting Frequently Asked Questions

For more setting guides, please visit our website:

<https://www.faleemi.com/faq>

If you don't find the instructions you are looking for there, please contact us at support@faleemi.com.



1. How do i change my camera password?

To ensure the security of your camera, you are suggested changing the default password.




Please follow below steps to do it.

Click on the icon [>] at the right of the camera and select [Advanced Settings] and next [User Setting]. Enter your new password and click on [✓] on the top right. Note that once the password is changed here, it will take effect immediately.

1. Click on the [User Settings].

2. Select [admin], Click on [>].


3. Enter your new password, Click on [✓].



Record your new password here:

2. If you have several cameras, please set them up one by one according to the instruction from page 3.

After all of them are set up, please follow below steps to use multi-view function.



3. How do i change my video stream resolution?


Click on the icon  to change the resolution.

4. I mounted my camera upside down, how do I flip my camera's video stream?

Click on   to flip and mirror your camera.

5. How to reset your camera (restore to factory default)?

Push down the "Reset" button for around **10-15 seconds** until the **red light changes from blinking slowly to very quickly** and then let the Reset button go. If the reset is done successfully, **you will hear beep**. The camera will reboot automatically.

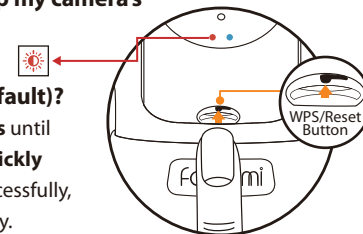

6. How to set Email alert?

Please visit http://support.faleemi.com/mail/Email_alert.pdf
If there is no the guide for your email server, please email us at support@faleemi.com



7. How to link your camera to your PC/Mac by Faleemi Plus?

Windows: Please visit <https://youtu.be/sEuauwrchbs>

Mac: Please visit <https://youtu.be/pljGg0l86N8>