



www.faleemi.com



support@faleemi.com



youtube.com/c/Faleemi



support@faleemi.com



facebook.com/FaleemiCamera



twitter.com/faleemi

Faleemi and the Faleemi logo are all trademarks or registered trademarks of Faleemi Technologies Ltd. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and the names of their products. Faleemi disclaims proprietary interest in the marks and names of others.

Apple®, Apple Store®, iPad®, iPhone®, MAC® (Text, Logo, Picture) are trademarks of Apple, Inc.

Android®, Google Play® (Text, Logo, Picture) are trademarks of Google Inc. Samsung® (Text, Logo, Picture) is a registered trademark of Samsung Electronics Co., Ltd.

Skype® (Text, Logo, Picture) is a registered trademark of Microsoft Corporation

Facebook® (Text, Logo, Picture) is a registered trademark of Facebook, Inc.

Twitter® (Text, Logo, Picture) is a registered trademark of Twitter, Inc.

Micro SD® text and logo are the trademark of SD-3C, LLC.

Wi-Fi® is a registered trademark of the Wi-Fi Alliance.

All other products, names or companies are the brands or registered trademarks of their respective owners.

© Faleemi Technologies Ltd or its affiliates. All rights reserved.

No part of this publication may be reproduced or transmitted in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from Faleemi Technologies Ltd ("Faleemi"). Faleemi reserves the right to revise this publication and to make changes in content from time to time without obligation on the part of Faleemi to provide notification of such revision or change.

Faleemi provides this guide without warranty of any kind, implied or expressed, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Faleemi may make improvements or changes in the product(s) described in this manual at any time.

The capabilities, system requirements and/or compatibility with third-party products described herein are subject to change without notice.



Version.07.2019

Made in China

Quick Start Guide

FSC776



FSC776W



FSC776B



We at Faleemi are committed to do our part in protecting our environment. In this continuing effect, we have supplied the detailed manuals, documentation, software, troubleshooting and video guides on our website.



www.faleemi.com/support

Thank You

Dear Customer,

Thank you for choosing Faleemi among all the brands. We hope our products will protect your home and give you peace of mind.

At Faleemi, we truly care about our customers' Purchase Experience and User Experience, so "Customer satisfaction guaranteed is our goal". We are 100% dedicated to your complete satisfaction.

If your experience has been something less than amazing, or need additional information, please drop us an email at support@faleemi.com. Or you are welcome to visit our website www.faleemi.com/faq for more information. Please do remember that we are always more than happy to ensure you're a HAPPY Customer.

As a growing company, we are improving all aspects of our service and products. If you got any suggestion or comment, welcome to let us know. We will continue to improve and provide our customers with quality products and service.

Yours sincerely,

Team Faleemi



www.faleemi.com



support@faleemi.com



youtube.com/c/Faleemi



facebook.com/FaleemiCamera

Contents


Product information	1
Download APP and Getting started	2
Setup Option A: Step 1 / One Key WiFi Recommended	3
Add the connected camera to Faleemi App	5
Setup Option B: Add cameras via WiFi configuration guide	7
Live Video Interface	13
Pan / Tilt / Zoom Control	14
How to connect the camera to the second Phone?	15
Advanced Settings	17
How to do the settings for receiving message alert on your phone?	18
[Push Setting]	19
[Alarm Event]	20
[Notifications]	21
How to set it to record constantly to the memory card?	22
How to record alarm video to the memory card?	23
How to view the recorded video on memory card?	24
Trouble Shooting Frequently Asked Questions	25
1. How do I change my camera password?	26
2. Timer Restart option	27
3. How do I turn up/down the volume?	27
4. Multi-view	28
5. How do I change my video stream resolution?	28
6. How do I flip my camera's video stream?	28
7. How to reset your camera (restore to factory default)?	28
8. How do I change the WiFi SSID on my router?	29
9. How do I find the WiFi MAC address of my camera?	29
10. How to set Faleemi camera IP Address and Port?	30
11. How to set Email alert?	30
12. How to link your camera to your PC/Mac by Faleemi Plus?	30
13. What do I do when I'm prompted "Exceed MAX User"?	31

What's in the box?

- FSC776 HD Pan/Tilt Wireless Security IP Camera
- Ceiling/Wall Mounting Bracket
- Mounting Screws & Plugs
- Power Adapter
- Quick Start Guide



Connections

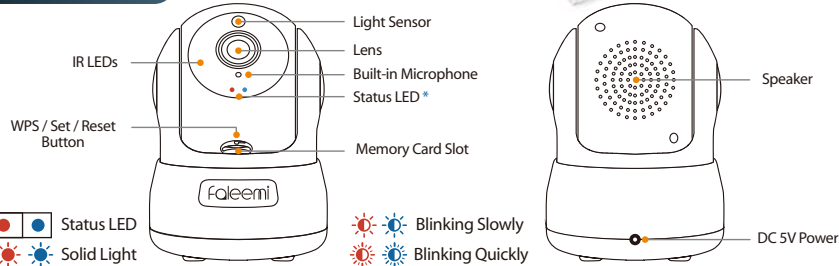

Indicator Light Status	Device Status
Red light is blinking slowly	Power up and activating or no internet/WiFi connection
Blue light is blinking slowly	The device is ready to connect
Red light is blinking quickly	The device is reset to restore to factory default
Blue light is blinking quickly	The device is receiving the WiFi signal or connecting to the WiFi
Red light goes off	The device is not activated.
Blue light goes off	The device failed to connect to the network
Blue and red lights are solid and steady	The device is connected to the network

Download the Faleemi APP (Android / iOS) before doing the setup

Connect your mobile device to your WiFi and download the App "Faleemi" from the App Store or Google Play store, or scan below QR code to download it.



Note: If you already use the Faleemi app, make sure that you are using the latest version. To find the updates, please go to the App store (ios) or Google Play (Android) and search for Faleemi.




Before configuring your camera, please read the points below.

- Please make sure the camera is in the same room, close to your WiFi router. You can relocate it to where you want after it is all set up. You just unplug it and move it to the new location and plug it in, the camera will connect to your WiFi automatically, no need to set it up again. Please make sure your phone is connected to your **2.4GHz WiFi (not cellular data and 5GHz WiFi)**. Your 2.4GHz WiFi name (SSID) must be different from your 5.0GHz one. Please make sure your WiFi name and password do not have the special characters " # ; \ ". If you are not sure, please go to your router settings to find this out.
- Note: THIS WILL NOT AFFECT THE 5GHz WIFI USE OF YOUR OTHER WIRELESS DEVICES :)** If you don't know how to go to your router settings, please visit our website
- www.faleemi.com/blocks/router to find the instructions or contact us at support@faleemi.com.

Now, please follow below instructions to get your camera set up.


Setup Option A: Step 1 / One Key WiFi

1. Please **put your camera close to your WiFi router** and plug it in, you will hear "Beep". The camera is initializing by rotating from left to right and up to down and stop in center finally. And then you will see the red light is blinking slowly.

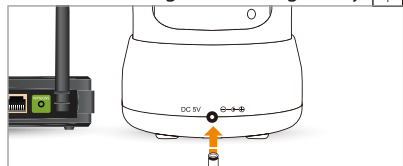



Note: when the camera is startup, it will sound one "Beep"

2. Please press down the **Set Button** for about 3 seconds until you see the LED light is blinking blue and then let it go.

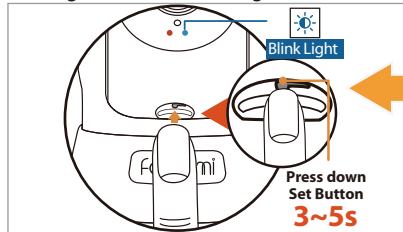


Note: The reset button is small, not easy to hold it down, please make sure you feel that it is pressed down.

3. Open the Faleemi App, click on the menu icon **[More]**, Click on **[One key WiFi]**.

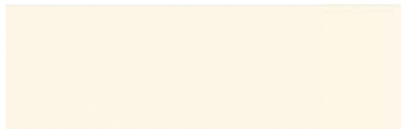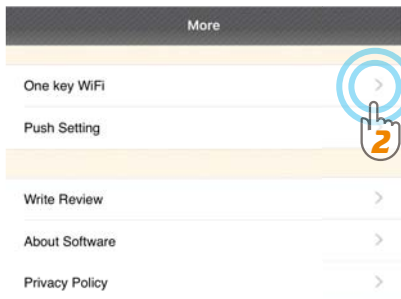


CAUTION: Holding for longer than 10 seconds will reset the camera (when you see the LED is blinking red fast).

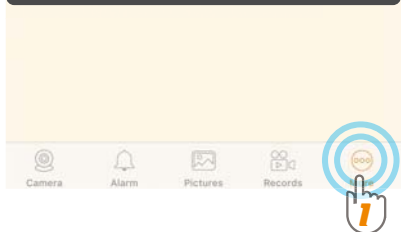

Note: If you already use the Faleemi app, make sure that you are using the latest version. To find the updates, please go to the App store (ios) or Google Play (Android) and search for Faleemi.

4. Enter your 2.4GHz WiFi password, Click on **[Configuration]**.

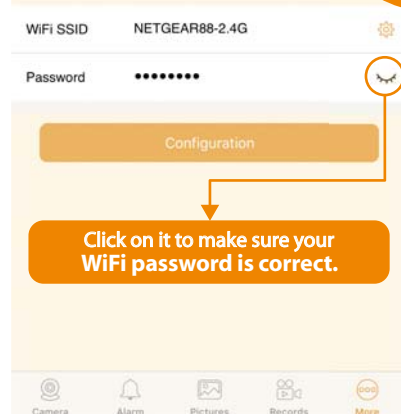

Note: When click on "Configuration" button. Your phone will make a loud sound to transmit the data to the camera.

5. Wait for some moment until you see the blue light is solid on. Which indicates the camera is connected to your WiFi already.

Troubleshooting

1. If you see the blue light goes off instead of solid on, the WiFi password you just input may be wrong. Please hold the reset button down for 3 seconds again until you see the blue light is blinking and do the setup again.
2. If your WiFi password was correct but still failed, the WiFi you were connected may be 5GHz WiFi.
3. If all your WiFi and password were correct, it is still failed, there may be the special characters # ; \ in your WiFi SSID or password.

6. And follow **Page 5** to add the camera to your mobile/tablet Faleemi APP.


Setup Option A

Setup Option A


Setup Option A: Step 2 / Add the connected camera to Faleemi App

*Please make sure the phone is connected to the same WiFi as the camera you've connected to.


1. Click on **[Add Camera]**.

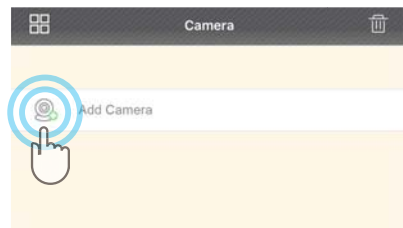


2. Click on **[Add the cameras which are already connected to your WiFi network]**.

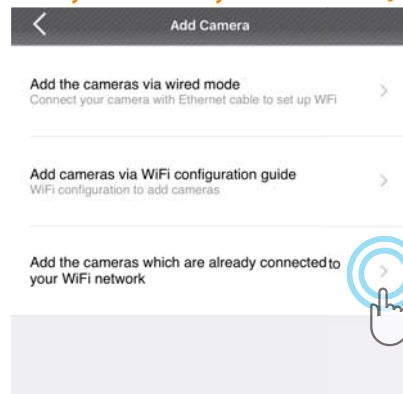


3. Click on **[LAN Search]**.

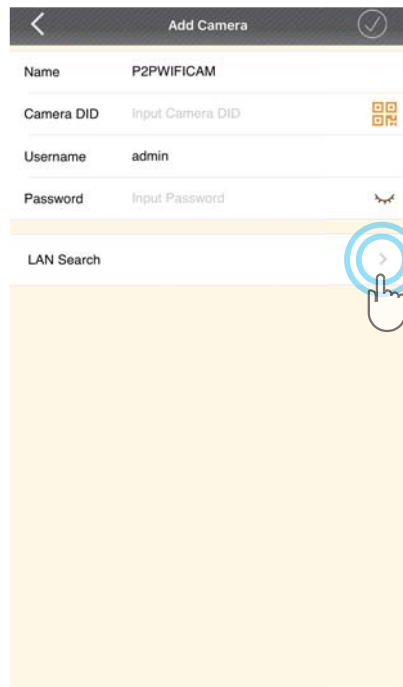


4. Click on the camera searched.

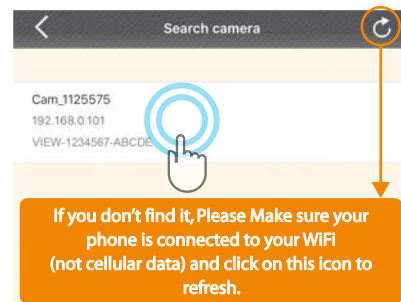

5. Give your camera a name, and put the default password (**123456**), click on **[✓]**.

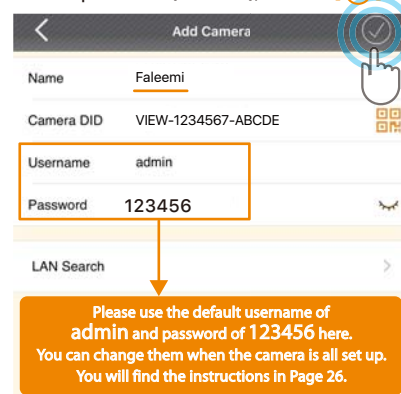

6. You will see it says the camera is **Online**. Congratulations! Your camera is all set up. **Click on the image** to enjoy viewing and controlling it now.

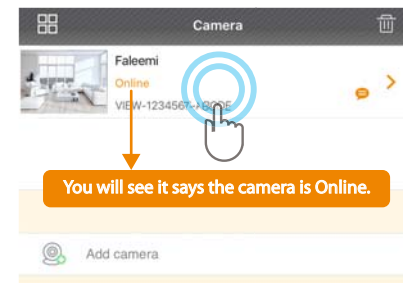


Congratulations!
Your camera is connected now

- 1. To ensure the security of your camera, you are suggested changing the default password. Please refer to the Instruction in Page 26.
 - 2. You can relocate the camera now. Please just unplug it and move it to the new location and plug it in, the camera will connect to your WiFi automatically, no need to set it up again.
- * But please make sure the new location will be not far from your router.


Setup Option B: Add cameras via WiFi configuration guide

1. Please **put your camera close to your WiFi router** and plug it in, you will hear "Beep". The camera is initializing by rotating from left to right and up to down and stop in center finally. And then you will see the red light is blinking slowly.

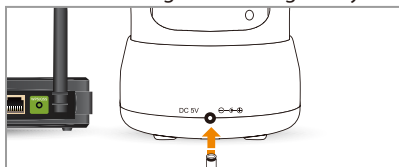

Note: when the camera is startup, it will sound one "Beep"


2. Please press down the **Set Button** for about 3 seconds until you see the LED light is blinking blue and then let it go.

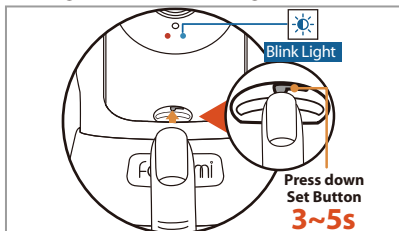

Note: The reset button is small, not easy to hold it down, please make sure you feel that it is pressed down.


CAUTION: Holding for longer than 10 seconds will reset the camera (when you see the LED is blinking red fast).

3. Open the Faleemi App, click on **[Add Camera]**.

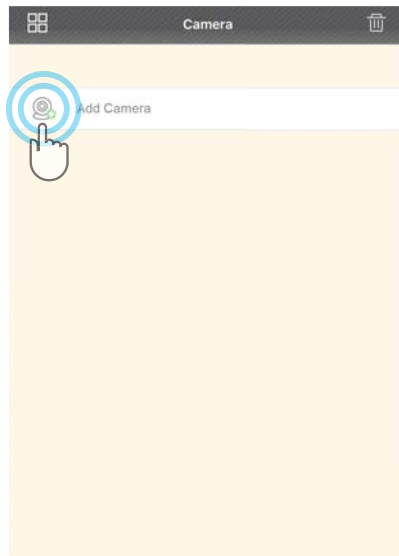


Note: If you already use the Faleemi app, make sure that you are using the latest version. To find the updates, please go to the App store (ios) or Google Play (Android) and search for Faleemi.


4. Click on **[Add cameras via WiFi configuration guide]**.

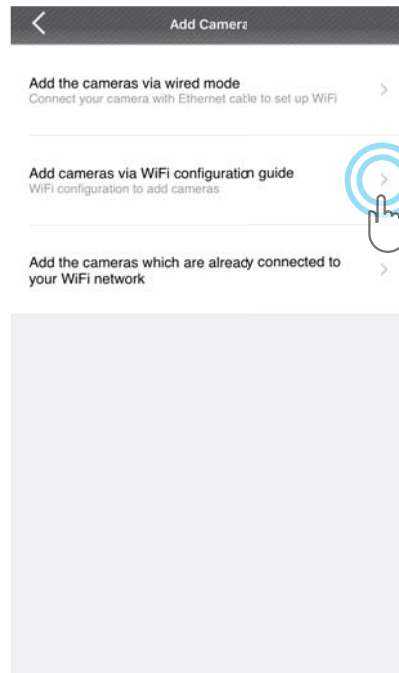


5. Please scan the QR Code at the bottom of the camera.

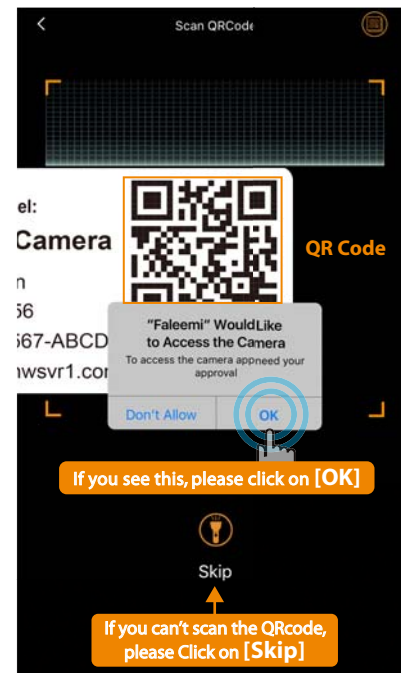


6. Click on **[The blue light is flashing slowly]**.

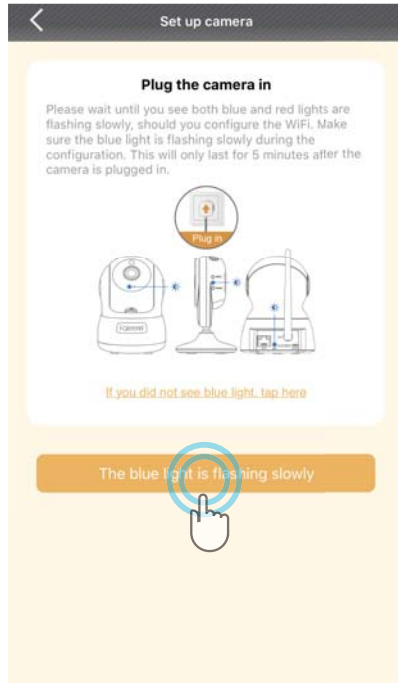

7. Type in the name you have selected for your camera and click on **[Next]**.

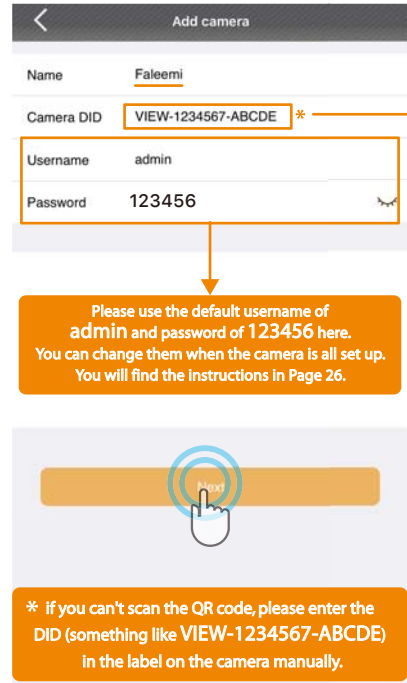

8. Input your WiFi password and click on **[Connect to WiFi]**.

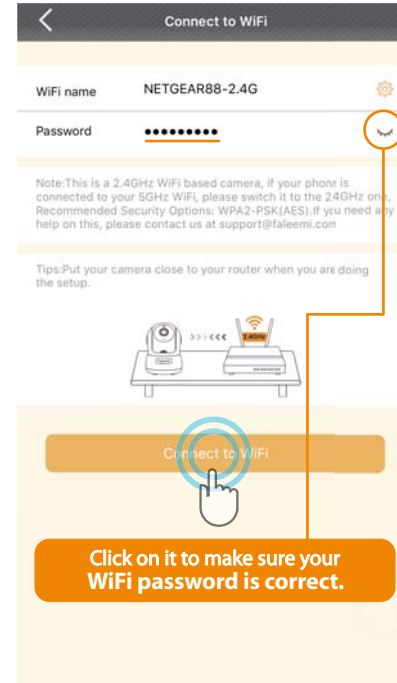


9. It generates a QR code on your phone. Bring this QR code within 6 inches of the camera (looking at the lens of the camera) and keep it still. When you see blue light will blink very rapidly, it is done.




10. When you see the blue light blinks very rapidly, click on **[Blue light is blinking rapidly]**.



11. Connect to WiFi.

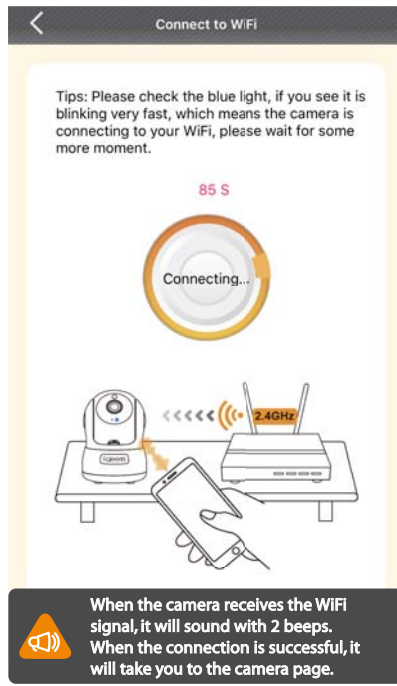

12. You will see it says the camera is **Online**. Congratulations! Your camera is all set up. **Click on the image** to enjoy viewing and controlling it now.

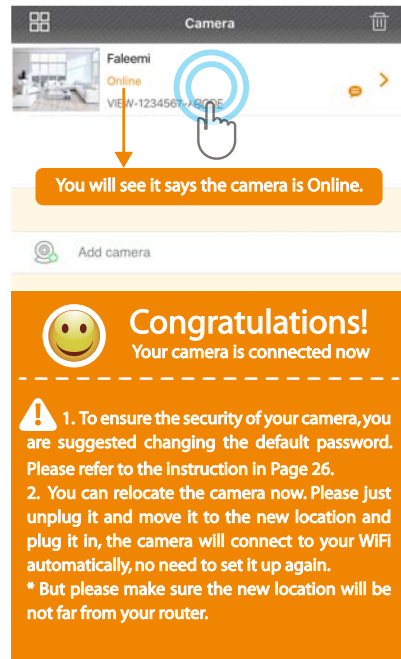

Troubleshooting

1. If you see the blue light goes off instead of solid on, the WiFi password you just input may be wrong. Please hold the reset button down for 3 seconds again until you see the blue light is blinking and do the setup again.
2. If your WiFi password was correct but still failed, the WiFi you were connected may be 5GHz WiFi.
3. If all your WiFi and password were correct, it is still failed, there may be the special characters # ; \ in your WiFi SSID or password.

! If the setting is failed, please find below solution or contact us by

?!? Email: support@faleemi.com
 Skype: [support@faleemi.com](https://www.skype.com/en/contacts/faleemi)
 Phone: **213 293 3560**
 EDT: 6am~11am, 8pm~11pm
 PDT: 6am~8am, 5pm~12pm

! When you call us, please wait some more moment until we pick up the phone.

Live Video Interface



Tips: turn on the Microphone; you will see a pop-up button "Hold to Talk," Hold this button to talk.


- | | | |
|---------------------|-----------------------|----------------------------------|
| Cruise Vertically | Snapshot to phone | Restore to default |
| Cruise Horizontally | Record video to phone | 480P / 720P |
| Menu | Audio on/off | Contract |
| Flip | Microphone on/off | IR LED Off |
| Mirror | Contrast | LED Auto Mode |
| Exit | Brightness | Preset Set or Call Preset |

Pan / Tilt / Zoom Control

When you slide on the screen, if it doesn't turn any more, it means it arrives the end of this direction, please turn it in opposite direction.



iOS

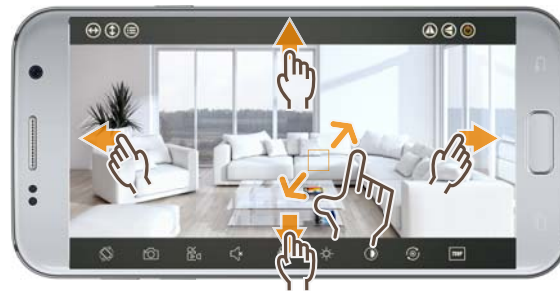

Android

How to connect the camera to the second Phone?

After you use one phone to get your camera connected, if you would like to add your camera to the second phone.


Option A Locally

If your second phone can be connected to the same WiFi as your camera, please follow the instruction in **Page 5**.


Option B Remotely

If your second phone can not be connected to the same WiFi, please follow below instructions.


1. Download the Faleemi App to your second phone.
2. Open the Faleemi App, Click on **[Add Camera]**.

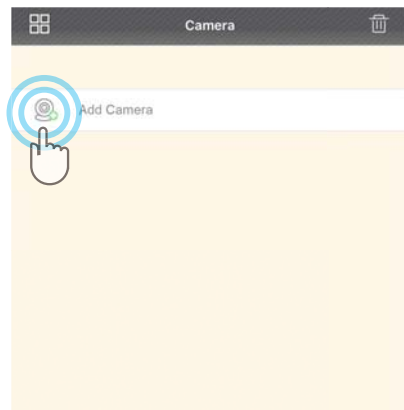

3. Click on **[Add the cameras which are already connected to your WiFi network]**.

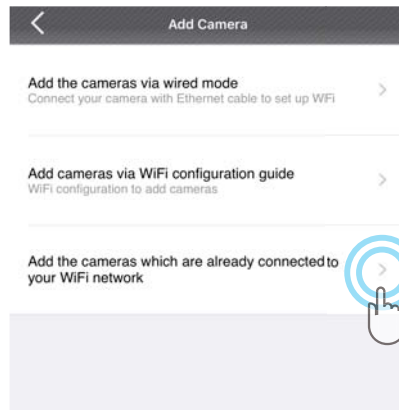


4. Please find your camera DID (something like **VIEW-1234567-ABCDE**) in your first phone or the label on the camera.

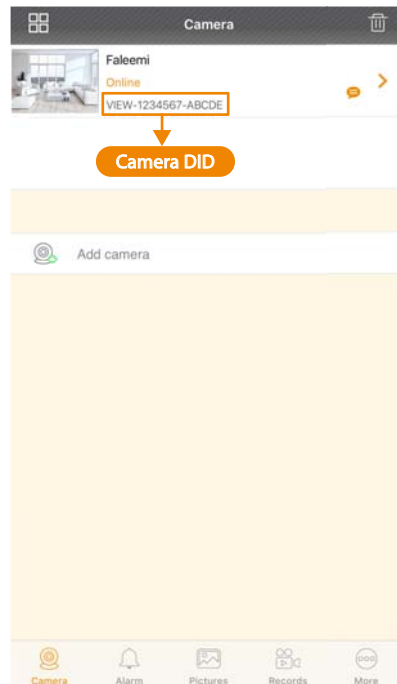

5. Give your camera a name, and input Camera DID, Password, click on **[✓]**.

It will take you to the home page.

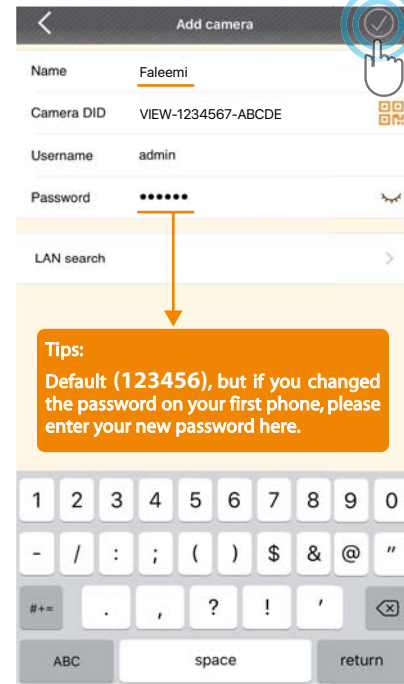


Advanced Settings

Please follow below steps to go to Advanced Settings to do more settings.

1. Click on the icon [>].




2. Click on [Advanced Settings].

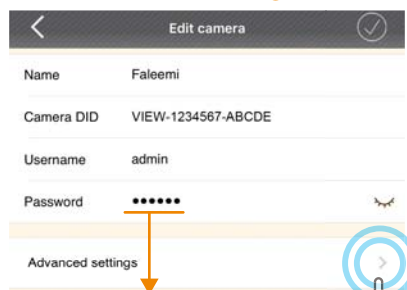

Tips:
If you change your password, please remember to update the new password to your other phone and click on "✓"


3. Do [Advanced Settings] here.

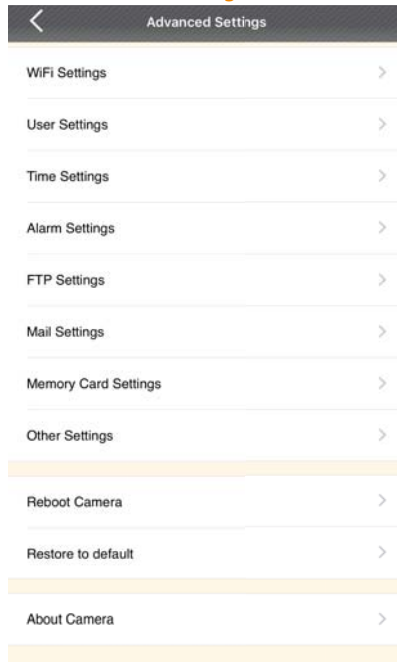


How to do the settings for receiving message alert on your phone?

[Alarm Settings]

1. Click on the icon [>].

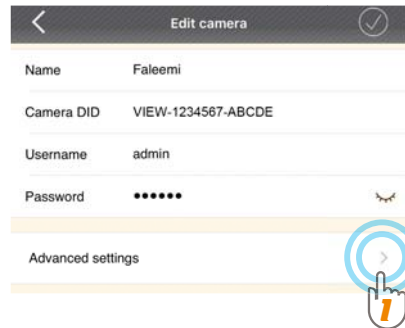


2. Click on [Alarm Settings].

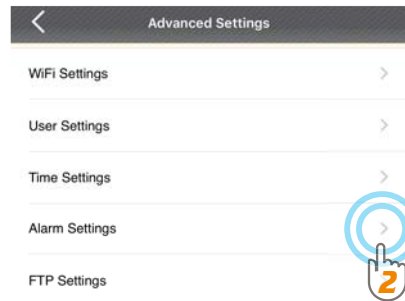


3. Enable [Motion Detection Alarm].

4. Click on [✓].

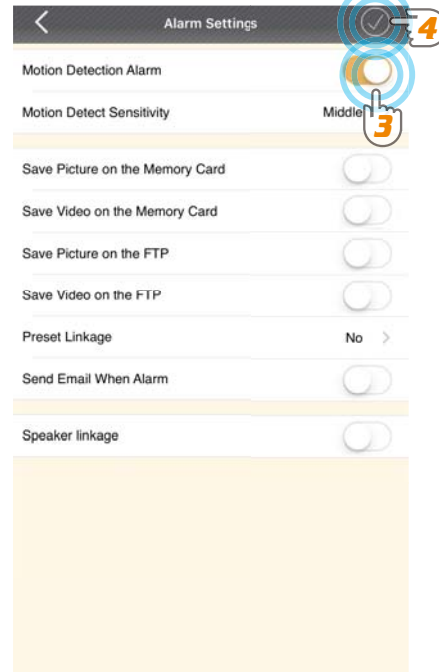

[Push Setting- iOS]


1. Click on **[More]**. 2. Click on **[Push Setting]**.

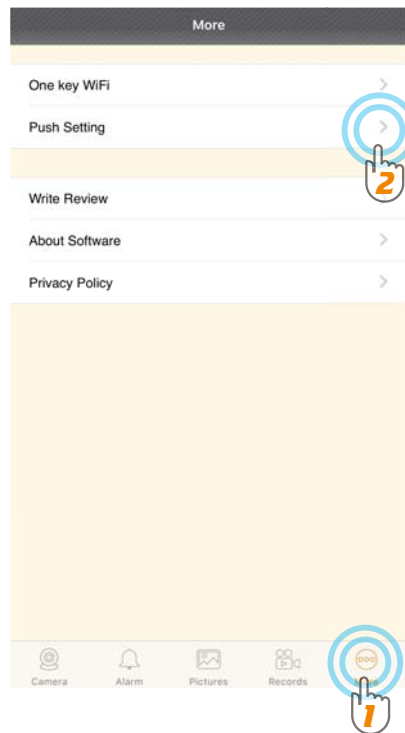

3. Find the camera you want to receive message alert and turn on the button **[Allow app receiving push message]**.



4. Click on **[OK]**.

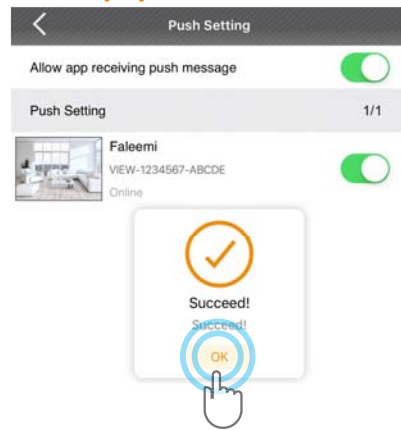


[Push Setting- Android]

1. Click on the icon **[>]**.




2. Enable **[There is an alarm]**, **[Allow Push alarm]** 3. Click on **[✓]**.

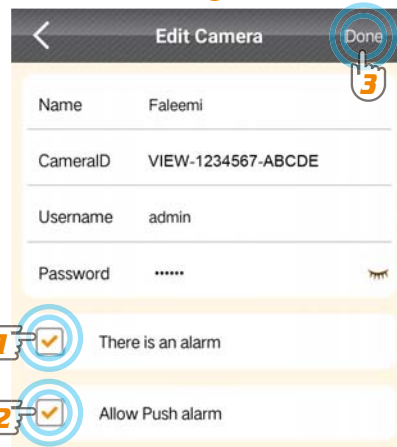

Alarm Event

1. Click on **[Alarm]**. 2. Click on **[>]**.

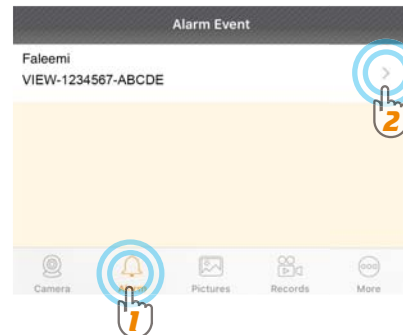


3. It shows alarm log list.




Notifications

You will receive text messages when there's motion.

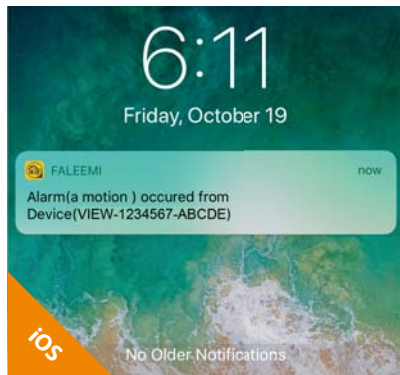


If you don't receive the message, please go to your phone's **[Settings]—[Notifications]—[Faleemi APP]** to check if you turn on the button **“Allow Notifications”**.

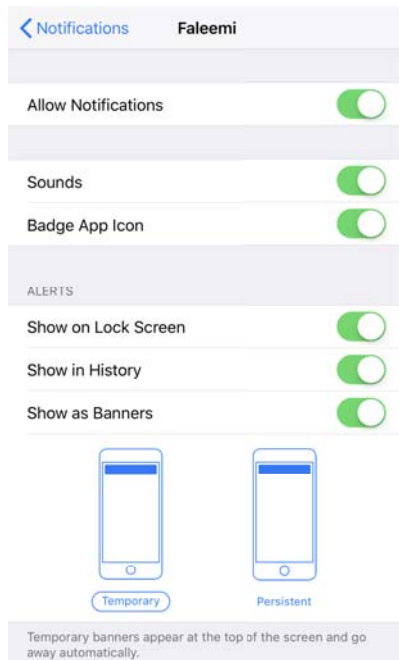

How to set it to record constantly to the memory card?


* Please format your memory card before using.



Memory Card Slot


Please insert the Micro SD card as what shows at left. Suggest using Micro SDHC/SDXC (* MicroSD, MicroSDHC text and logo are the trademark of SD-3C, LLC)

1. Click on the icon [>].

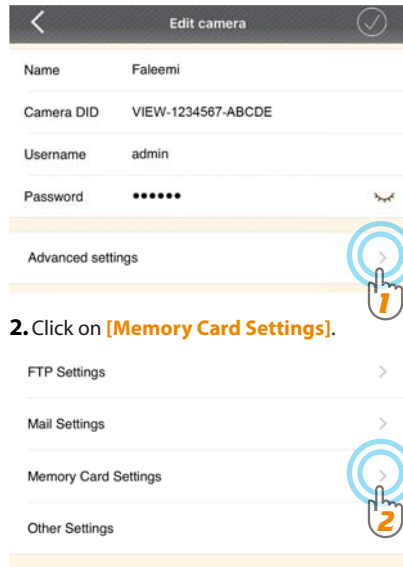


2. Click on **[Memory Card Settings]**.

3. Enable **[Continuous Recording]**.
4. Set **[Record Time]** (15 Mins Max).
5. Click on [✓].

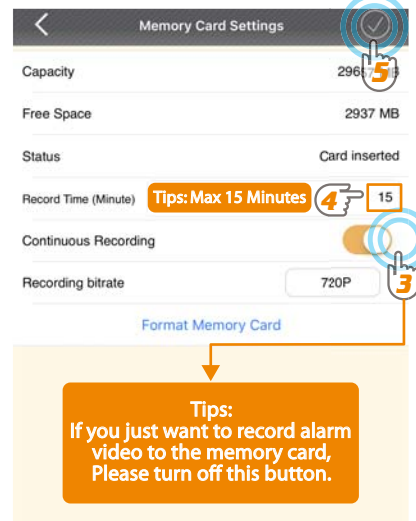


How to record alarm video to the memory card?

1. Click on the icon [>].

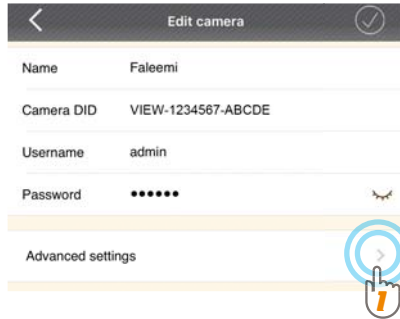


2. Click on [Alarm Settings].

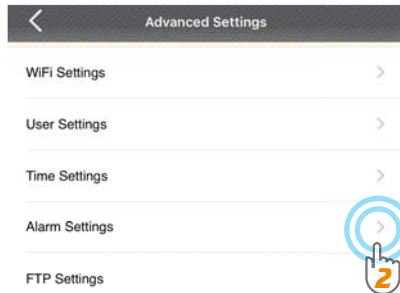

3. Enable [Motion Detect Alarm].

4. Enable [Save Video on the Memory Card].

5. Click on [✓].

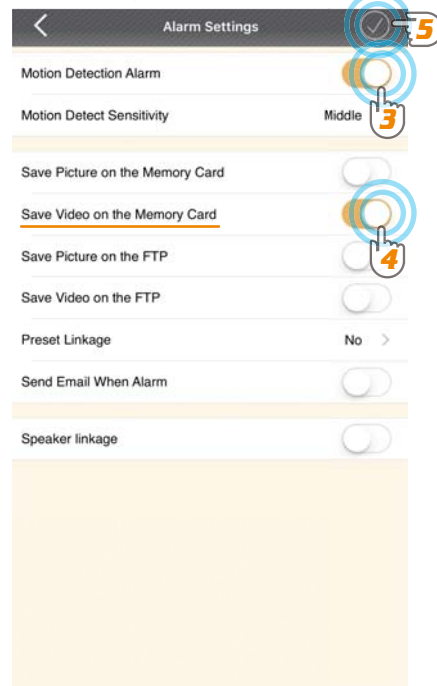

How to view the recorded video on memory card?

1. Click on [Records].

2. Click on [Memory Card].

3. Click on [Camera].




4. Click on [All], Select recording.

5. Select Date.

6. Click on [✓].



7. Click on the file to playback the recorded video.

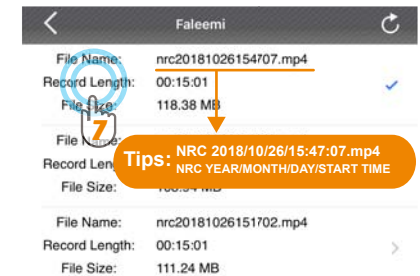


2. If you will be away from your camera for a long time, for example, you will be on holiday for several months, there may be power outage or network disconnection.

We suggest you using Timer Restart option. 

You can set the camera to reboot by itself during this time period.


Please refer to this instruction to do the setup.

<http://support.faleemi.com/help/rebot.pdf>




3. How do I turn up/down the volume?


1. Click on [>].



2. Click on [Advanced Settings].




3. Click on [Other Settings].

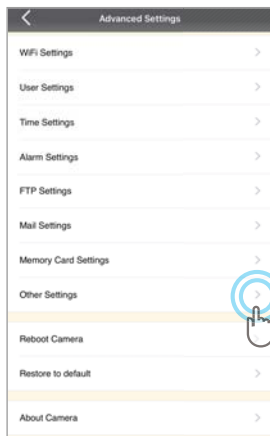

4. Click on [Volume Setting].



5. Slide on the button to turn up/down the volume and click on [OK].



4. If you have several cameras, please set them up one by one according to the instruction from page 3. After all of them are set up, please follow below steps to use multi-view function.



5. How do i change my video stream resolution?


Click on the icon  to change the resolution.

6. I mounted my camera upside down, how do I flip my camera's video stream?

Click on   to flip and mirror your camera.

7. How to reset your camera (restore to factory default)?

Push down the "Reset" button for around **10-15 seconds** until the **red light changes from blinking slowly to very quickly** and then let the Reset button go. If the reset is done successfully, **you will hear beep**. The camera will reboot automatically.

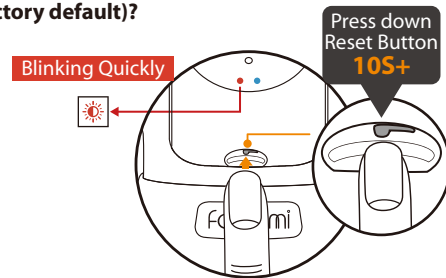

8. How do I change the WiFi SSID on my router?

Windows 7



<https://youtu.be/8gx60SEHSu4>

Windows 10



<https://youtu.be/V3pgXHvQ67U>

MAC



<https://youtu.be/qzwRIwLnNPg>


For more router settings, please visit

<https://www.faleemi.com/blocks/router>

If there is no the guide

for your router settings,

please email us at support@faleemi.com



More Router Settings

9. How do I find the WiFi MAC address of my camera?

If you need the WiFi MAC address of the camera to connect it to your router, please take the photo of the label on the camera and send it to

support@faleemi.com.

We will provide you with the WiFi Mac address



10. How to set Faleemi camera IP Address and Port ?

Please visit

<https://youtu.be/2uFUQkM6cBo>



11. How to set Email alert?

Please visit

<http://support.faleemi.com/mail/alert.pdf>

If there is no the guide for your Email server,

Please email us at support@faleemi.com



12. How to link your camera to your PC/Mac by Faleemi Plus?

Faleemi Plus for Windows:

http://support.faleemi.com/software/Faleemi_Plus_v1.0.2.exe

Faleemi Plus for Mac:

http://support.faleemi.com/software/Faleemi_Plus_v1.0.2.dmg

Windows



<https://youtu.be/sEuauwrchbs>

MAC



<https://youtu.be/pljGg0l86N8>

13. What do I do when I'm prompted "Exceed MAX User"?

- A.** It supports up to 4 users to watch at the same time, if the camera has more than 4 devices in use, please exit the other devices completely and re-enter.
- B.** If no more than 4 devices are in use, please exit the Faleemi app completely and re-enter
- C.** If you are still prompted to exceed the number of users, please reset the camera (**page 28**), start it over again (**page 3**) and then change the camera password as per the instructions in **page 26**.