

QUICK START GUIDE

FSC880



www.faleemi.com



support@faleemi.com



support@faleemi.com



www.facebook.com/faleemi

Apple, Apple Store, iPad, iPhone, MAC (Text, Logo, Picture) are trademarks of Apple, Inc.
Android, Google Play (Text, Logo, Picture) are trademarks of Google Inc.
Samsung (Text, Logo, Picture) is a registered trademark of Samsung Electronics Co., Ltd.
MicroSD text and logo are the trademark of SD-3C, LLC.
Wi-Fi is a registered trademark of the Wi-Fi Alliance.
All other products, names or companies are the brands or registered trademarks of their respective owners.



Technical specifications are subject to change without notice.
No responsibility is taken for errors in contents or printing.
© Faleemi Technologies Ltd or its affiliates. All rights reserved.

Version .03.2018



We at Faleemi are committed to do our part in protecting our environment. In this continuing effect, we have supplied the detailed manual and startup guide on our website <http://support.faleemi.com>.

www.faleemi.com



THANK YOU

Dear Customer,


Thanks for purchasing our products. If you encounter any problem while configuring your camera, or need additional information, please feel free to contact the Faleemi Support by **email/skype: support@faleemi.com**. Or visit the Faleemi website : **https://www.faleemi.com/faq**.

What's in the box ?

- Faleemi 1080P Pan&Tilt Wifi IP Camera FSC880
- Wi-Fi Antenna
- Network Cable
- Ceiling/Wall Mounting Bracket
- Mounting Screws & Plugs
- Power Adapter
- Software CD
- Quick Start Guide



Connections

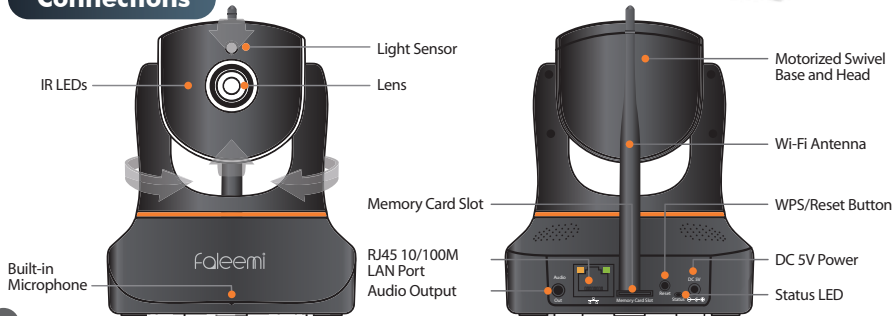

* Status LED Solid Light Blinking Slowly Blinking Quickly


Indicator Light Status	Device Status
Red light is blinking slowly	Power up and activating
Red and blue lights are blinking slowly	The device is ready to connect
Blue light is blinking quickly	The device is receiving the wifi signal or connecting to the wifi
Blue and red lights are solid and steady	The device is connected to the network
Red light is blinking quickly	The device is reset to restore to factory default
Blue light goes off	The device failed to connect to the network



Please download the Faleemi APP before doing the setup

Download the App (Android and iOS)

First, connect your mobile device to your WiFi and download the App "Faleemi" from the App Store or Google Play store, or scan below QR code to download it.

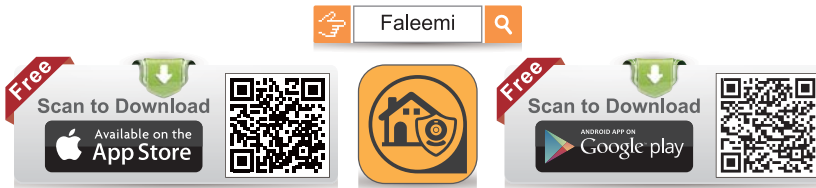


Setup by Ethernet Cable


1. Please plug the camera in with the included power supply. Please connect the camera to your router with the included ethernet cable.



Note, when the camera is startup, it will sound one "beep"

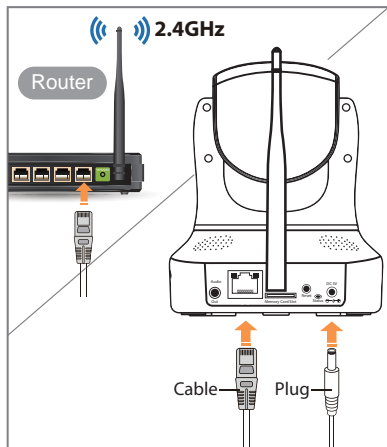


2. Open the Faleemi App, Click on **[Add Camera]**.

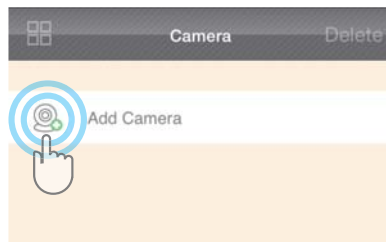


3. Click on **[Add the camera via wired mode]**.




4. Click on **[Next]**.

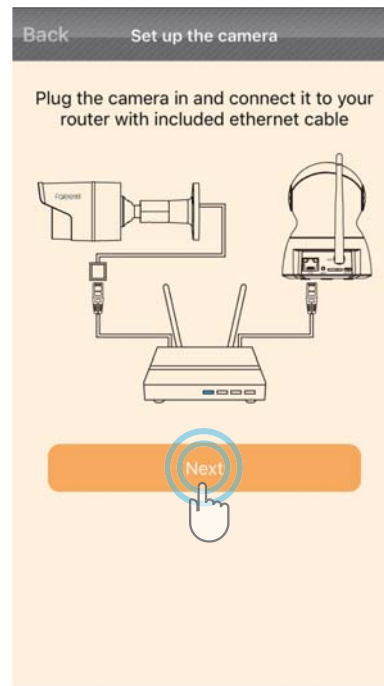

5. Please scan the QR Code at the bottom of the camera

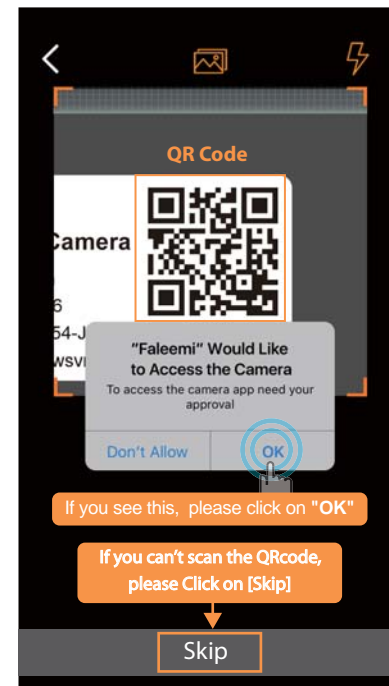


6. Type in the name you have selected for your camera and click on **[Next]**.

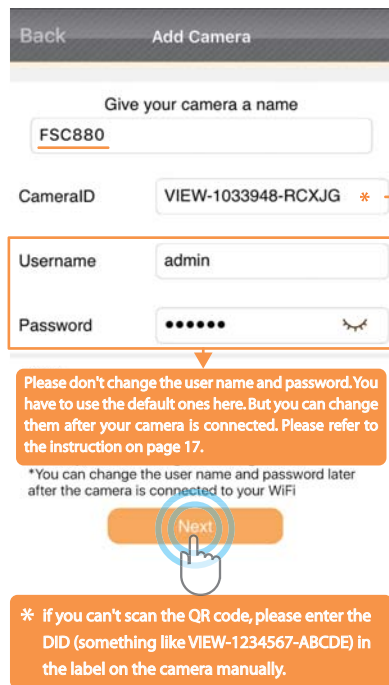


7. It says Connection succeeded, if you want to use wired connection, please click on **[Cancel]**; if you want to use wifi, please click on **[OK]** to do the wifi connection.




8. Choose WiFi to connect

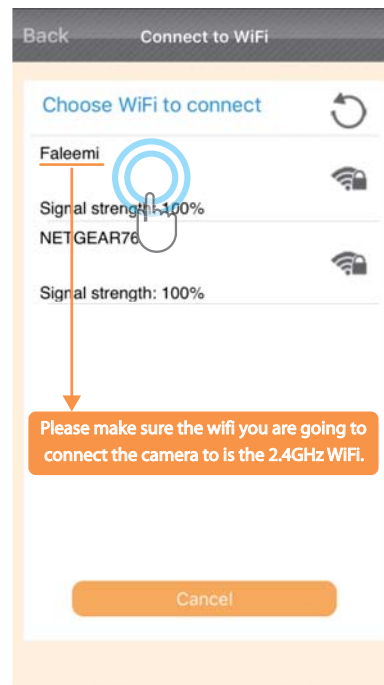



9. Please enter your wifi password, click on **[Next]**.

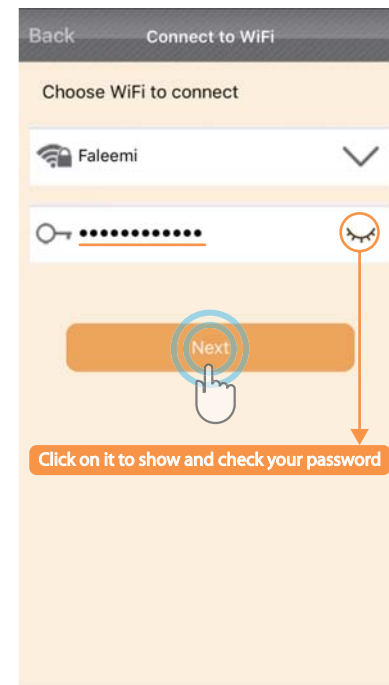

10. It will show WiFi is set successfully. There will be 2 beep sound. It means the camera is connected to your wifi, Click on **[OK]**, please remove the ethernet cable.

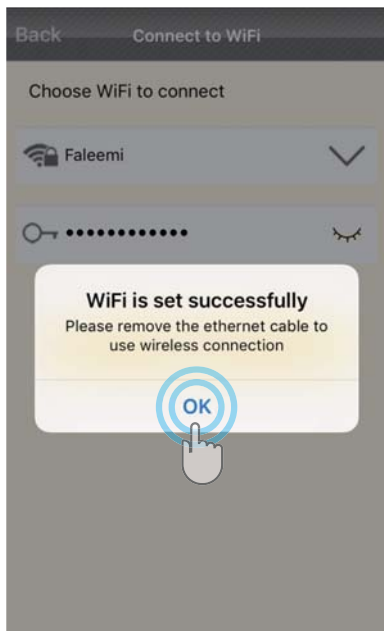

11. **Click on the image** to start to view & control.

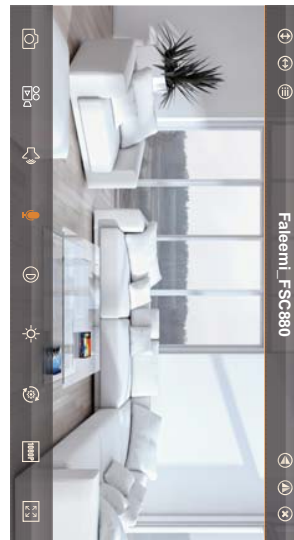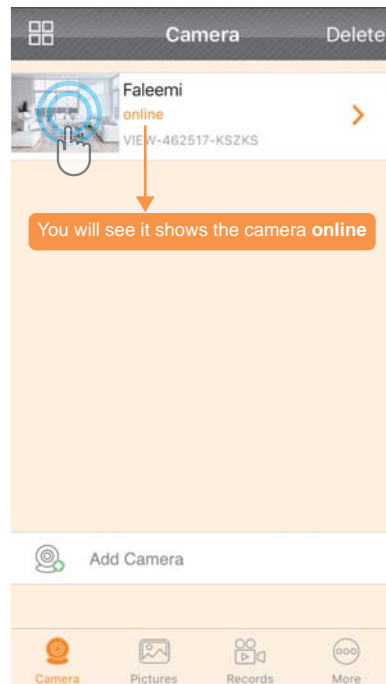



 **Congratulations!**
Your camera is connected now


 To ensure the security of your camera, you are suggested to change the default password. Please refer to the instruction in Page 17.


If you are not able to connect your camera to your router with ethernet cable, here are the other 2 wireless connection instructions.

Please visit
<http://support.faleemi.com/fsc880/setup2.pdf>



 If the setting is failed, please contact us by

 Email: support@faleemi.com
Skype: [support@faleemi.com](https://www.skype.com/contact)
Phone: **213 293 3560**
EST: 6am~11am, 8pm~11pm
PST: 6am~8am, 5pm~12pm

 When you call us, please wait some more moment until it gets through.

Live Video Interface




Turn on the Microphone; you will see a pop-up button "Hold Talk", press down this button to talk to the people at the camera side.

- | | | |
|---------------------|-----------------------|----------------------------------|
| Cruise Vertically | Snapshot to phone | Restore to default |
| Cruise Horizontally | Record video to phone | 480P/1080P |
| Menu | Audio on/off | Contract |
| Flip | Microphone on/off | IR LED Off |
| Mirror | Contrast | Auto |
| Exit | Brightness | Preset Set or Call Preset |

Pan / Tilt / Zoom Control



iOS

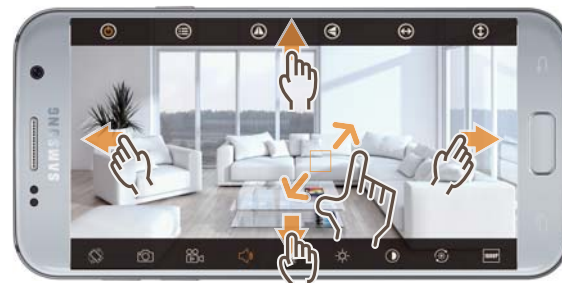


Android

How to connect the camera to the second Phone?


After you use one phone to get your camera connected to your WiFi and you can view the live video from your first phone.

If you would like to add your camera to the second phone, **please ensure your second phone connects to your WiFi (the same WiFi your camera connected to)**.


1. Download the Faleemi App to your second phone.
2. Open the Faleemi App, Click on **[Add Camera]**.

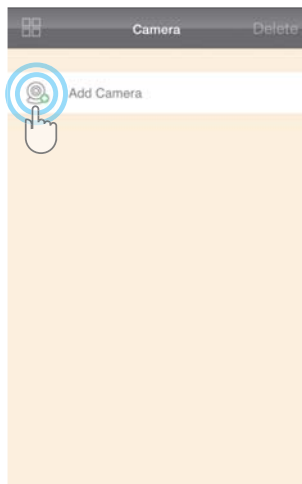


3. Click on **[Add the cameras which are already connected to your WiFi network]**

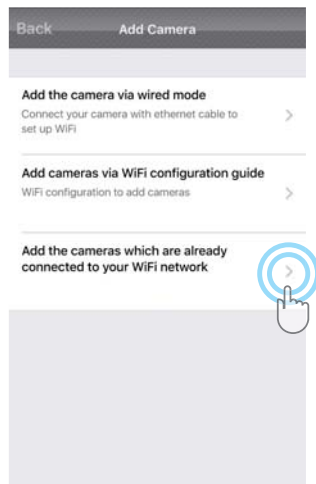


4. Click on **[LAN Search]**.

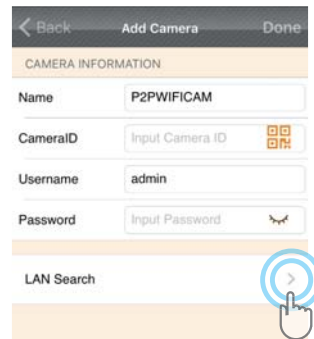

5. Click on the camera searched.

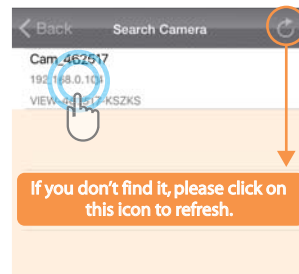

6. Give your camera a name, and input your Password, click on **[Done]** go back to home to start to view & control.

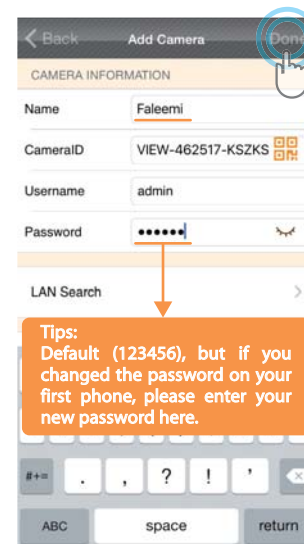

Advanced Settings

Please follow below steps to go to Advanced Settings to do more settings.

1. Click on the icon [>].
2. Click on [Advanced Settings].
3. Do advanced settings here.

Camera Delete

Cam_462517
online
VIEW-462517-KSZKS

Add Camera

Back Edit Camera Done

CAMERA INFORMATION

Name Cam_462517

CameraID VIEW-462517-KSZKS

Username admin

Password

Advanced Settings

Back Advanced Settings

WiFi Setting

User Setting

Time Setting

Alarm Setting

FTP Setting

Mail Setting

Memory Card Setting


OSD Setting

Reboot Camera

About Camera

Tips:
If you change your password,
please remember to update
the new password to your
other phone and click on
"Done"

How to set it to record constantly to the memory card?



Meromy Card Slot

Please insert the Micro SD card as what shows at left.
Suggest to use MicroSDHC* Class10 UHS-1 Memory Card.

(* MicroSD, MicroSDHC text and logo are the trademark of SD-3C, LLC)

* Please format your memory card before using.

1. Click on [Advanced Settings].
2. Click on [Memory Card Setting].
3. Enable [Memory Card Recording]
4. Set [Record Time] (15 mins Max)
5. Click on [Done].

Back Edit Camera Done

CAMERA INFORMATION

Name Cam_462517

CameraID VIEW-462517-KSZKS

Username admin

Password

Advanced Settings

Back Advanced Settings

WiFi Setting

User Setting

Time Setting

Alarm Setting

FTP Setting

Mail Setting

Memory Card Setting

OSD Setting

Reboot Camera

About Camera

Back Memory Card Setting Done

Memory Card Capacity 2961 MB

Memory Card Available Capacity 14751 MB

Memory Card Status Card inserted

Record Time(minute) 15

Memory Card Recording

Recording bitrate 1,720P


Format Memory Card

Tips: Max 15 Minutes

Tips:
If you just want to record alarm
video to the memory card,
please disable this button.


How to record alarm video to the memory card?

1. Click on the icon [>].
2. Click on [Alarm Setting]
3. Enable [Motion Detect Armed]
4. Enable [Save Video on the memory card]
5. Click on [Done]

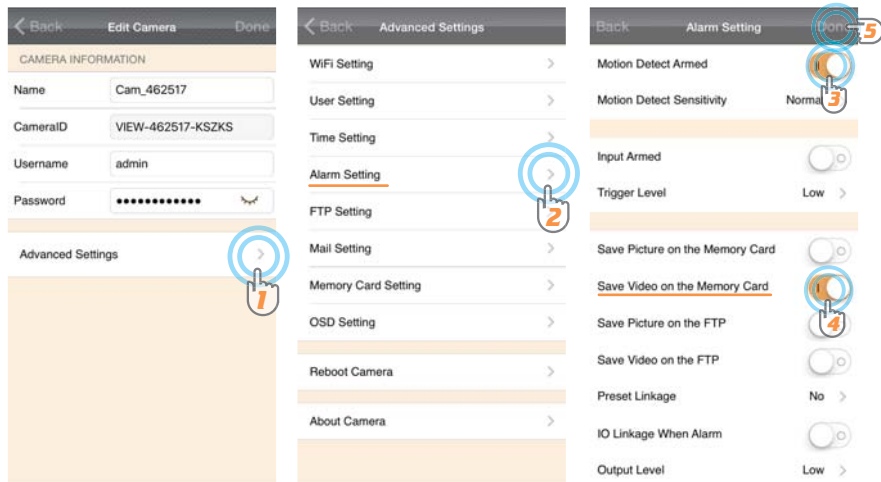

How to view the recorded video on memory card?

1. Click on [Records],
2. Click on [Remote].
3. Click on [All], select recording
4. Select Date
5. Click on [Done]
6. Click the file to play the recorded video

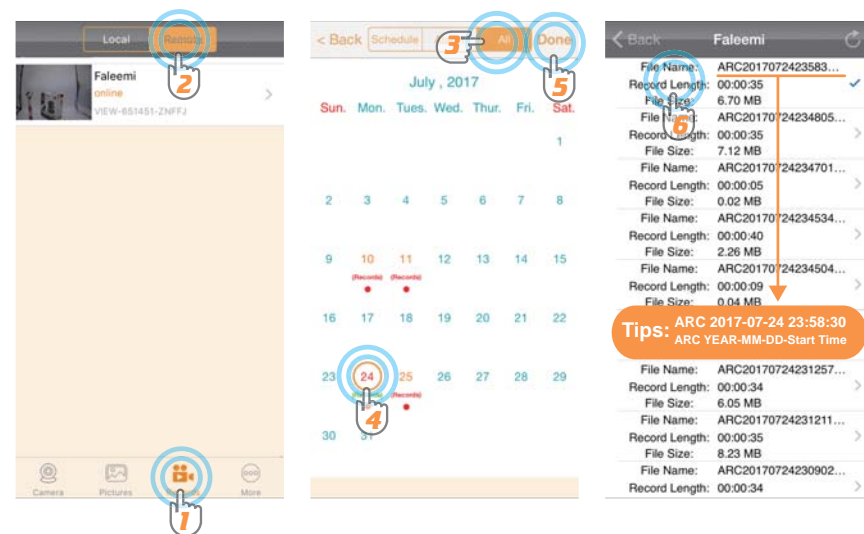

Trouble Shooting Frequently Asked Questions

1. How do I change my camera password?




To ensure the security of your camera, you are suggested to change the default password.

Please follow below steps to do it.

Click on the icon [>] at the right of the camera and select [Advanced Settings] and next [User Setting]. Enter your new password and click on [Done] on the top right. Note that once the password is changed here, it will take effect immediately.


1. Click on the [User Setting].

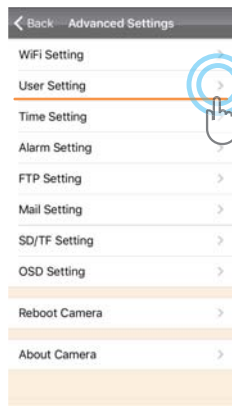

2. Select [admin], Click on [>].





3. Enter your new password, Click on [Done].

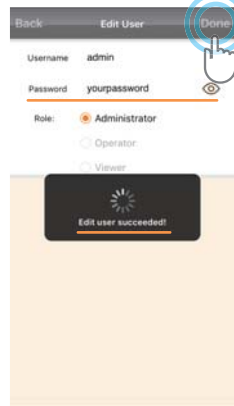

Record your new password here: _____

2.If you have several cameras, please follow below steps to use multi-view function.

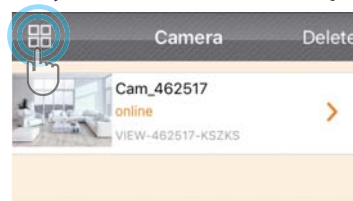

3. How do I change my video stream resolution?

Click on the icon **1080P** to change the resolution.

4. I mounted my camera upside down, how do I flip my camera's video stream?

Click on to flip and mirror your camera.

5. How to restore to factory default?


Push down the "Reset" button for around **10-15 seconds** until **the red light blinks very very fast** and then let the Reset button go. If the reset is done successfully, **you will hear beep**.

The camera will reboot automatically.

6. How to set email alert?

Please visit http://support.faleemi.com/FSC880/Email_alert.pdf
If there is no the guide for your email server, please email us support@faleemi.com.

Scan the QR Code to view

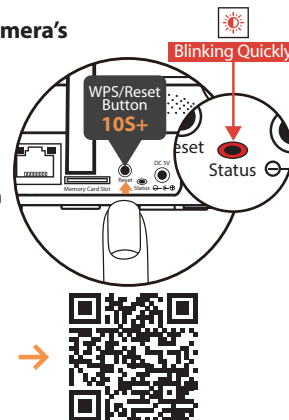

7. How to link your camera to your PC/Mac by Faleemi Plus

Windows: Please visit <https://youtu.be/5Euawrchbs>

Mac: Please visit <https://youtu.be/pljGg0l86N8>